



REV.	LOOAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2014.04.14	李春桥



Specifications


Current Rating: 3Amp
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding: 600V AC/DC
Contact Resistance: 20mΩ Max.
Operating Temperature: -40°C to +105°C

Materials

Contact Material: Brass /Gold /Tin
Insulation Material: Polyester, UL 94V-0
PBT/Nylon 6T
All materials must be GP materials

Recommended P.C.Board

Hole Layout


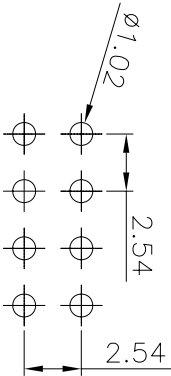


Ordering Information

FHD257 - XX XX A 01

No. of Pins per Row Contact Plating
01= Tin
02= Gold Flash

Duplex plating
05=Gold Flgsh /Tin
10=Gold 5u" /Tin
15=Gold 10u" /Tin
35=Gold 30u" /Tin

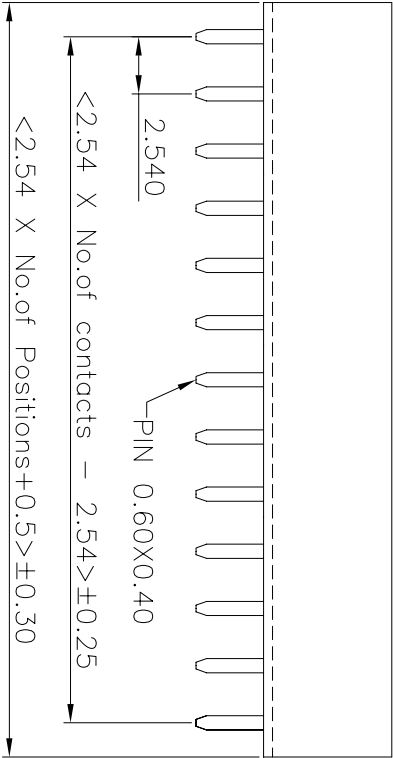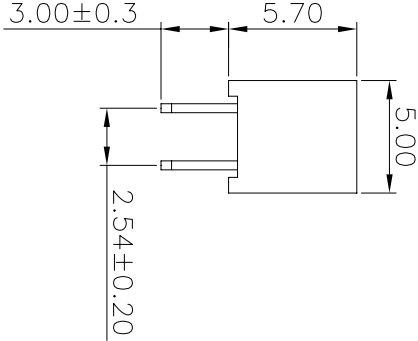

 深圳市硕康达科技有限公司 ShenzhenShi Sokcom Technology Co., Ltd				GENERAL TOLERANCE		DESIGN: 李春桥	DATE: 2014.04.14	DWG. NO. FHD257-A01	TITLE: 2.54 FEMALE HEADER DUAL ROWS DIP TYPE BASE 5.70H
REV. 01		UNIT. mm	SCALE. 1:1	PAGE. 1/1					
					X. ± 5.0°	X. ± 0.30	CHECKED:	DATE:	
					X. ± 3.0°	X. ± 0.25	AUDITED:	DATE:	
					.XX ± 2.0°	.XX ± 0.15	APPROVED:	DATE:	
					.XXX ± 1.0°	.XXX ± 0.10			