





REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2007.10.10	尹 晖

Specifications

Current Rating: 3Amp
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding: 600V AC/DC
Contact Resistance: 20mΩ Max.
Operating Temperature: -40°C to +105°C


Materials

Contact Material: Brass Gold Flash /Tin
Insulation Material: Polyester, UL 94V-0
Nylon 6T
All materials must be GP materials

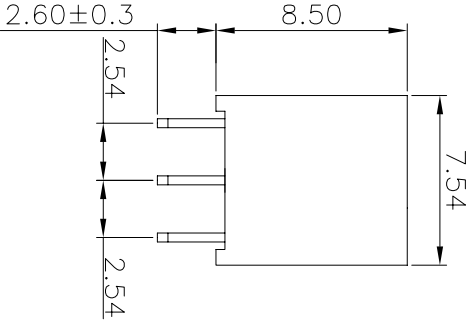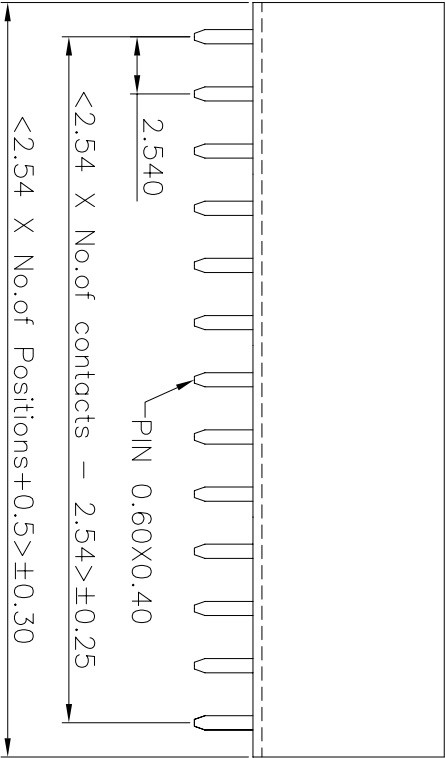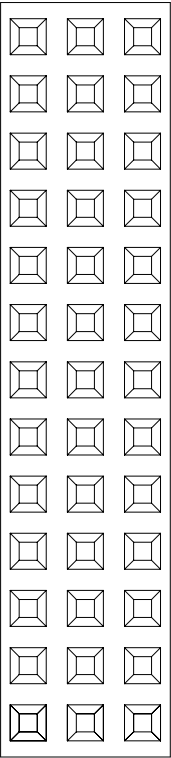

Recommended P.C.Board

Hole Layout

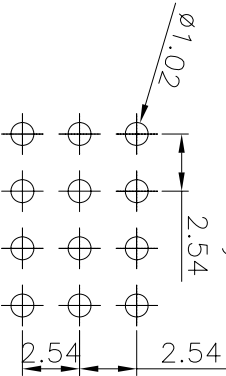

Ordering Information

FHD301 - XX XX A 01

No. of Pins per Row Contact Plating
01=Tin
02=Gold Flash
05=Gold Flash /Tin
10=Gold 10u"/Tin
...
02~40

Duplex plating
05=Gold Flash /Tin
10=Gold 10u"/Tin
...

 深圳市硕康达科技有限公司 ShenzhenShi Sokcoonn Technology Co., Ltd				GENERAL TOLERANCE		DESIGN: 尹 晖	DATE: 2007.10.10	DWG. NO.	TITLE.
				X. ± 5.0°		X. ± 0.30	CHECKED:	DATE:	FHD301 -A01
				.X° ± 3.0°		.X ± 0.25	AUDITED:	DATE:	
				.XX° ± 2.0°		.XX ± 0.15		DATE:	
				.XXX ± 1.0°		.XXX ± 0.10	APPROVED:	DATE:	

2.54 FEMALE HEADER
ROWS DIP TYPE
BASE 8.50H