REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2011.04.22	宋 辉

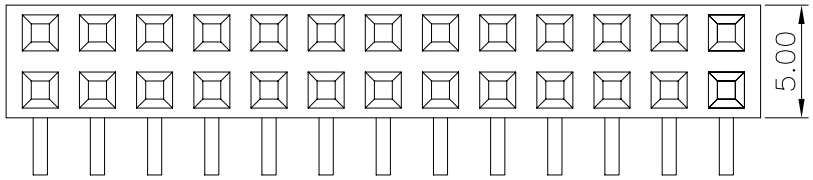

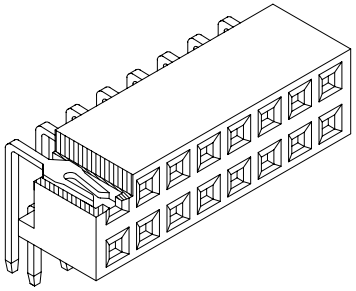

Specifications

Current Rating: 3Amp
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding: 600V AC/DC
Contact Resistance: 20mΩ Max.
Operating Temperature:−40°C to +105°C

Materials

Contact Material: Brass/Gold Flash /Tin
Insulation Material: Polyester, UL 94V−0
Nylon 6T
All materials must be GP materials

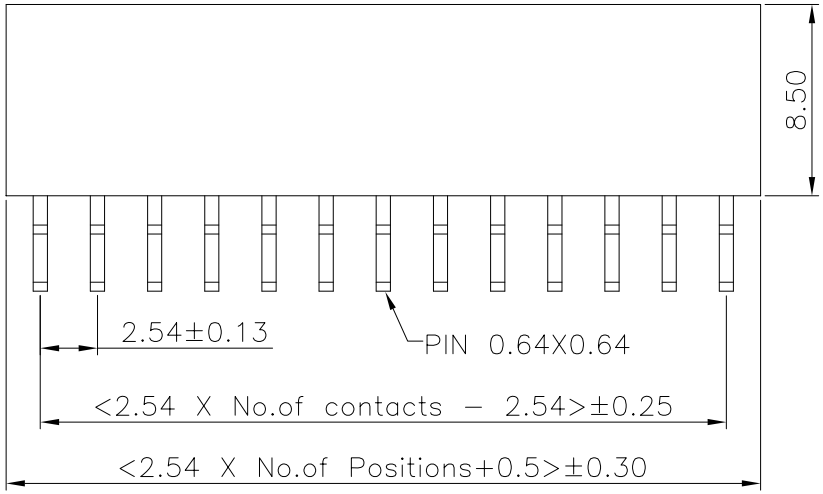

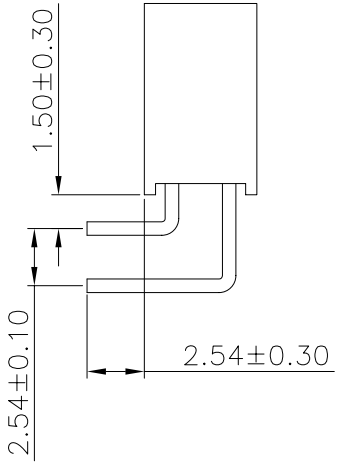

Recommended P.C.Board

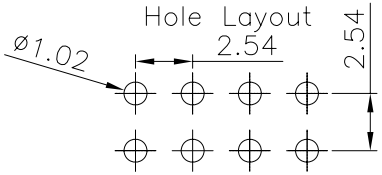

Ordering Information

FHR264 - XX XX A 01

No. of Pins per Row
02~40

Contact Plating
01=Tin
02=Gold Flash
Duplex plating
05=Gold Flash /Tin
...

深圳市硕康达科技有限公司 ShenZhenShi Sokconn Technology Co.,Ltd	GENERAL TOLERANCE		DESIGN: 宋 辉	DATE: 2011.04.22	DWG. NO. FHR264−A01	TITLE. 2.54 FEMALE HEADER DUAL ROWS R/A TYPE BASE 8.50H
	X.° ± 5.0°	X. ± 0.30	CHECKED:	DATE:		
	.X° ± 3.0°	.X ± 0.25	AUDITED:	DATE:	PART NO. FHR264−XX XX A01	
	.XX° ± 2.0°	.XX ± 0.15	APPROVED:	DATE:		
	.XXX° ± 1.0°	.XXX ± 0.10				
REV. 01 / UNIT. mm / SCALE. 5:1 / PAGE. 1/1						