

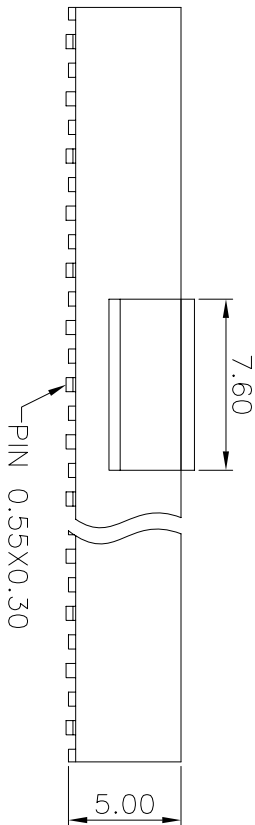
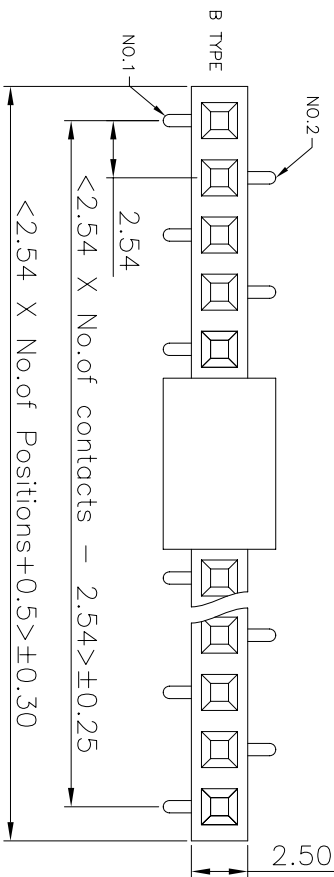
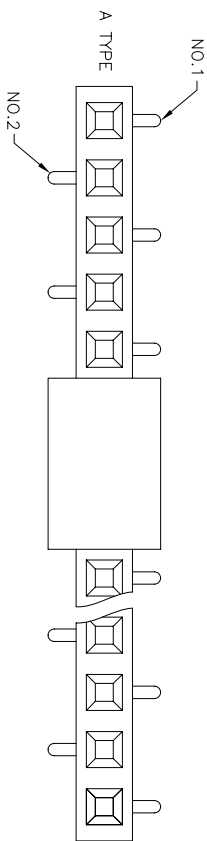


REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2013.05.21	李春桥

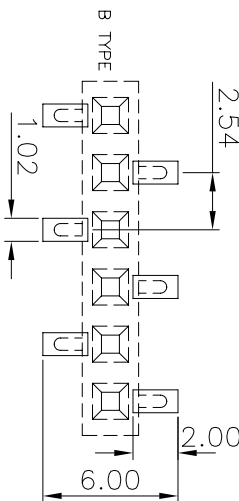

Recommended P.C.Board

Hole Layout

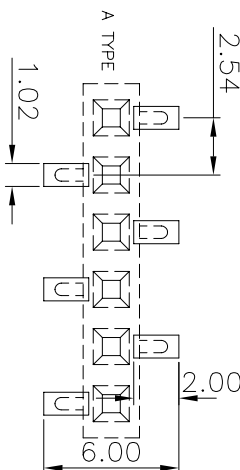


Specifications
Current Rating: 3Amp
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding: 600V AC/DC
Contact Resistance: 20mΩ Max.
Operating Temperature:-40°C to +105°C

Materials

Contact Material: Brass
Insulation Material: Polyester, UL 94V-0

Nylon 6T

All materials must be ROHS materials



Ordering Information

FHS105 - XX XX A 01 - X

No. of Pins per Row
02~40

Contact Plating
01=Tin
02=Gold Flash
Duplex plating
05=Gold Flash
Options
P=cup
T=tape reel
C=acetate tape
/Rt=cup+tape reel
...



深圳市硕康达科技有限公司
ShenzhenShi Sokocom Technology Co., Ltd

GENERAL TOLERANCE

DESIGN: 李春桥

DATE: 2013.05.22

DWG. NO.

FHS105-A01

TITLE:

2.54 FEMALE HEADER
DUAL ROWS SMT TYPE
BASE 5.0H

REV.	UNIT.	SCALE.	PAGE.
01	mm	1:1	1/1

X.* ± 5.0°	X. ± 0.30
X.* ± 3.0°	X. ± 0.25
.XX* ± 2.0°	.XX ± 0.15
.XXX* ± 1.0°	.XXX ± 0.10

CHECKED:

AUDITED:

APPROVED:

DATE:

DATE:

PART NO.

FHS105-XX XX A01-XX