



REV.	LOOQS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2007.10.12	邓亮

PIN 0.70X0.20


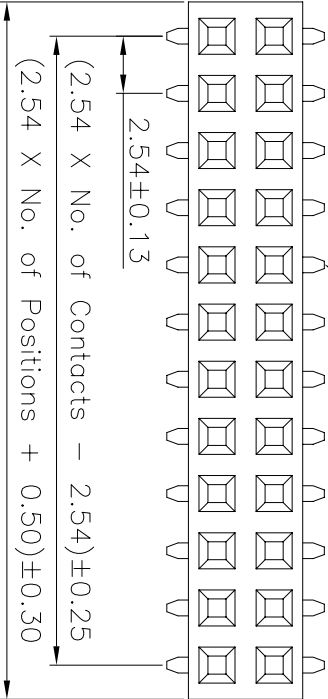


RECOMMENDED P.C.B LAYOUT
FOR TOP ENTRY
(Tolerance: ±0.05)

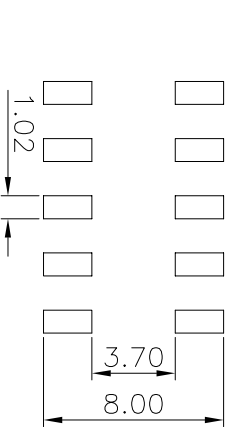

Specifications
Current Rating: 3Amp
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding: 600V AC/DC
Contact Resistance: 20mΩ Max.
Operating Temperature: -40°C to +105°C
Materials
Contact Material: Phosphor Bronze
Insulation Material: Polyester, UL 94V-0 PBT
All materials must be GP materials

Ordering Information

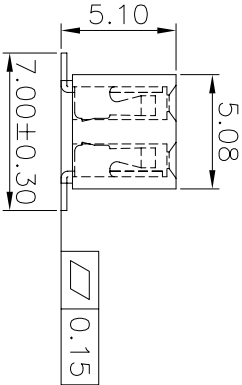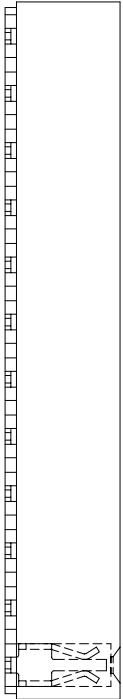

FHS206 - XX XX A 01 - X
No. of Pins per Row Contact Plating
02~40
01=Tin
02=Gold Flash
Duplex plating
05=Gold Flash /Tin
Options
P=cap
T=tape reel
O=acetate tape
PT=cap+tape reel
...



深圳市硕康达科技有限公司
ShenZhenShi Sokconn Technology Co., Ltd

GENERAL TOLERANCE

X.° ± 5.0° X. ± 0.30

X.° ± 3.0° X. ± 0.25

.XX° ± 2.0° .XX ± 0.15

.XXX° ± 1.0° .XXX ± 0.10

DESIGN: 邓亮

CHECKED:

AUDITED:

APPROVED:

DATE: 2007.10.12

DATE:

DATE:

DATE:

DWG. NO.

FHS206-A01

PART NO.

FHS206-XX XX A01-X

TITLE

2.54 FEMALE HEADER
DUAL ROWS SMT TYPE
BASE 5.00H

REV.

01

UNIT.

mm

SCALE.

5:1

PAGE.

1/1



1

2

3

4

5

6

7

8

9