

REV.	LOOAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2007.10.10	邓亮

Specifications

Current Rating: 3Amp
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding: 600V AC/DC
Contact Resistance: 20mΩ Max.
Operating Temperature: -40°C to +105°C






Materials

Contact Material: Phosphor Bronze.

Insulation Material: Polyester, UL 94V-0

Nylon 6T

All materials must be GP materials

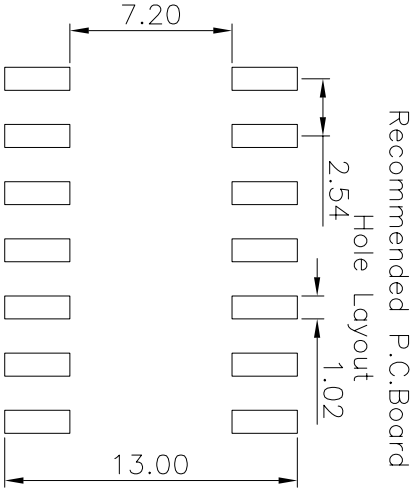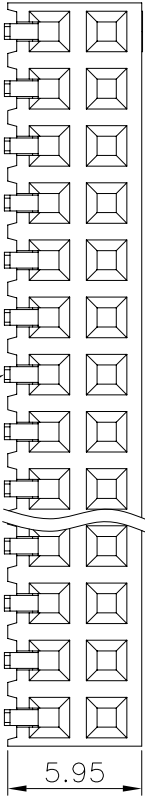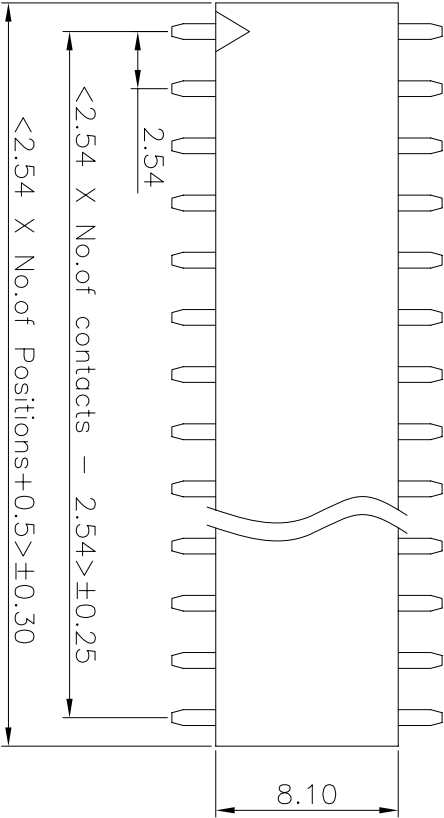

Ordering Information

FHS211 - XX XX A 01

No. of Pins per Row Contact Plating
02~40 01=Tin
02=Gold Flash
Duplex plating
05=Gold Flash /Tin



深圳市硕康达科技有限公司
ShenZhenShi Sokcomm Technology Co., Ltd

REV.	UNIT.	SCALE.	PAGE.
01	mm	5:1	1/1

GENERAL TOLERANCE			
X* ± 5.0°	X.	± 0.30	
X* ± 3.0°	X	± 0.25	
.XX* ± 2.0°	.XX	± 0.15	
.XXX* ± 1.0°	.XXX	± 0.10	

DESIGN: 邓亮		DATE: 2007.10.10
CHECKED:		DATE:
AUDITED:		DATE:
APPROVED:		DATE:

DWG. NO.	PART NO.
FHS211-A01	FHS211-XX XX A01

TITLE.
2.54 FEMALE HEADER DUAL ROWS SMT TYPE BASE 5.95H