

REV.	LOOAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2012.04.13	尹 晖

Specifications

Current Rating: 3Amp
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding: 600V AC/DC
Contact Resistance: 20mΩ Max.
Operating Temperature: -40°C to +105°C


Materials

Contact Material: Brass
Insulation Material: Polyester, UL 94V-0

Nylon 6T

All materials must be GP materials

Recommended P.C.Board
Hole Layout



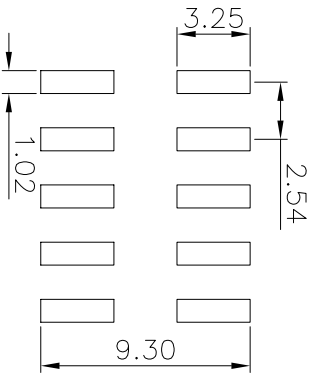


Ordering Information

FHS264 - XX XX A 01

No. of Pins per Row Contact Plating
01=Tin
02=Gold Flash
05=Gold Plating

Duplex plating
05=Gold Flash /Tin
...

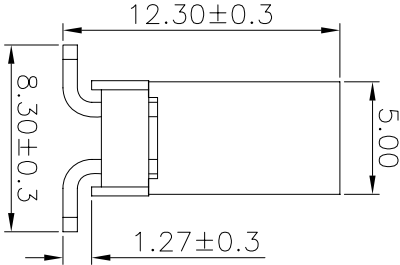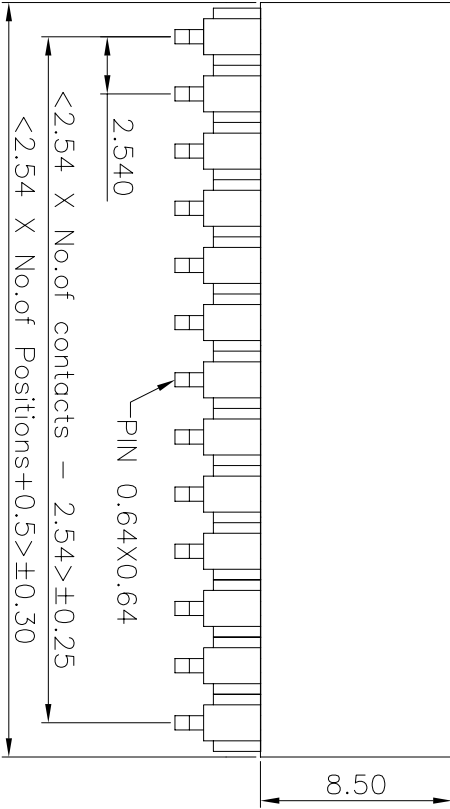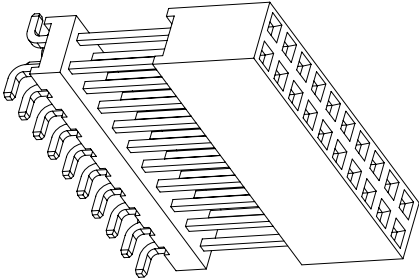

深圳市硕康达科技有限公司
ShenzhenShi Sokconn Technology Co., Ltd

GENERAL TOLERANCE

DESIGN: 尹 晖

DATE: 2012.04.13

DWG. NO.

FHS264-A01

TITLE:

2.54 FEMALE HEADER

REV.

01

UNIT.

mm

SCALE.

1:1

PAGE.

1/1



X. ± 5.0° X. ± 0.30

X. ± 3.0° X. ± 0.25

.XX ± 2.0° .XX ± 0.15

.XXX ± 1.0° .XXX ± 0.10

CHECKED:

AUDITED:

APPROVED:

DATE:

DATE:

DATE:

PART NO.

FHS264-XX XX A01

DUAL ROWS SMT TYPE

BASE 11.00H