






REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2011.12.07	? ?

Specifications

Current Rating: 3Amp
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding: 600V AC/DC
Contact Resistance: 20mΩ Max.
Operating Temperature:-40°C to +105°C

Materials

Contact Material: Brass
Insulation Material: Polyester, UL 94V-0
PBT/Nylon 6T
All materials must be GP materials

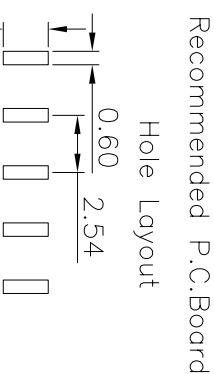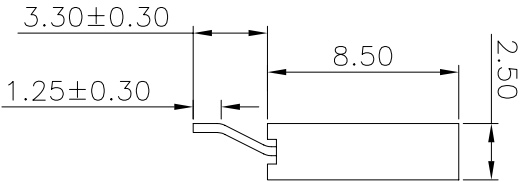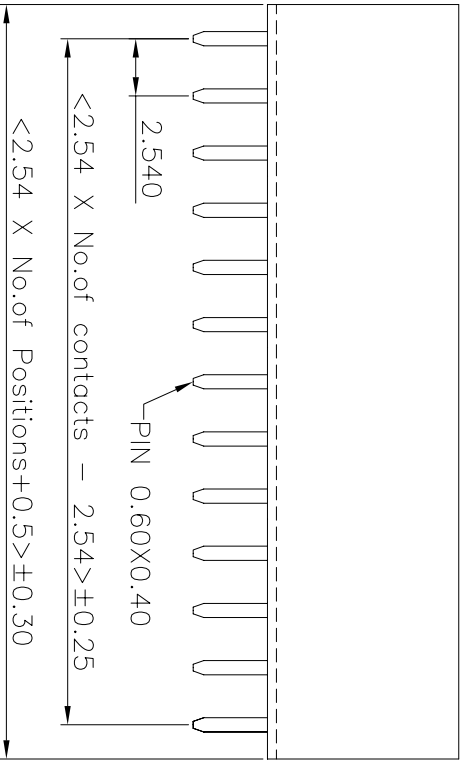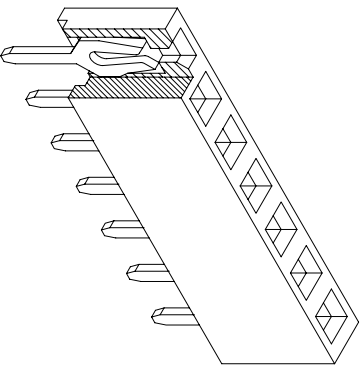

Ordering Information

FHW101 = XX XX A 01

No. of Pins per Row Contact Plating
02~40
01=Tin
02=Gold Flash
Duplex plating
05=Gold Flash /Tin
...

GENERAL TOLERANCE				DESIGN: ? ?	DATE: 2011.12.07	DWG. NO.	TITLE.
X° ± 5.0°	X.	± 0.30	CHECKED:	DATE:		FHW101-A01	2.54 FEMALE HEADER
X° ± 3.0°	.X	± 0.25	AUDITED:	DATE:		PART NO.	SINGLE ROWS SMT TYPE
.XX° ± 2.0°	.XX	± 0.15	APPROVED:	DATE:		FHW101-XX XX A01	BASE 8.50H
.XXX° ± 1.0°	.XXX	± 0.10					



深圳市硕康达科技有限公司
ShenzhenShi Sokcom Technology Co.,Ltd

REV.	UNIT.	SCALE.	PAGE.	
01	mm	1:1	1/1	