

REV.	LOOAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2011.08.18	尹 晖

Specifications

Current Rating: 3Amp
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding: 600V AC/DC
Contact Resistance: 20mΩ Max.
Operating Temperature: -40°C to +105°C

Materials


Contact Material: Brass/Gold/Tin
Insulation Material: Polyester, UL 94V-0

Nylon 6T

All materials must be GP materials

Recommended P.C.Board





Hole Layout

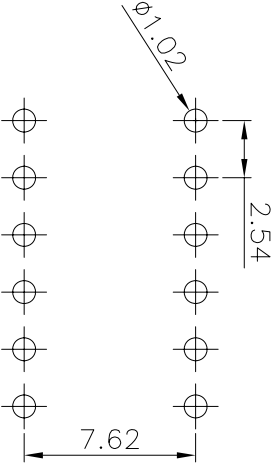

Ordering Information

FHW205 - XX XX A 01

No. of Pins per Row Contact Plating
02~40
01=Tin
02=Gold Flash
Duplex plating
05=Gold Flash /Tin
31=Gold 30u" /Tin
...

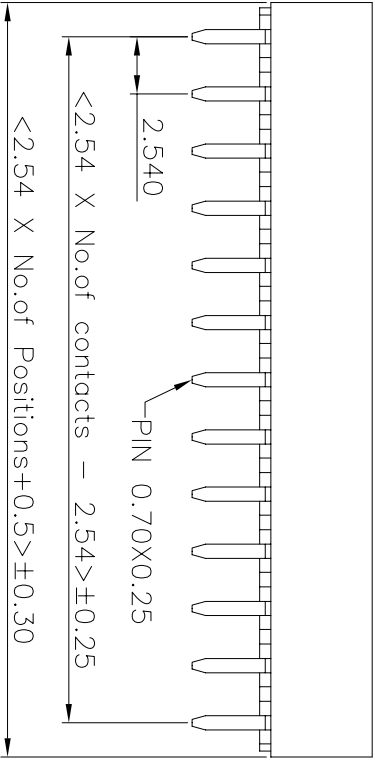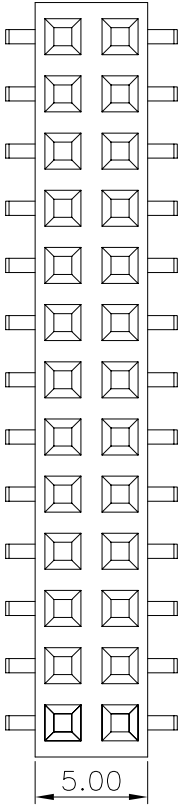

深圳市硕康达科技有限公司
Shenzhen Shi Sokoon Technology Co., Ltd

GENERAL TOLERANCE				DESIGN: 尹 晖		DATE: 2011.08.18		DWG. NO. FHW205-A01		TITLE. 2.54 FEMALE HEADER DUAL ROWS DIP TYPE BASE 5.00H	
X. ± 5.0°				CHECKED:		DATE:		PART NO.			
.XX ± 3.0°				AUDITED:		DATE:		FHW205-XX XX A01-X			
.XXX ± 1.0°				APPROVED:		DATE:					

REV.	UNIT.	SCALE.	PAGE.
01	mm	1:1	1/1