

REV.	LOOAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2007.10.10	邓亮

Specifications

Current Rating: 3Amp
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding: 600V AC/DC
Contact Resistance: 20mΩ Max.
Operating Temperature: -40°C to +105°C

Materials


Contact Material: Phosphor Bronze.
Insulation Material: Polyester, UL 94V-0

Nylon 6T

All materials must be GP materials

Recommended P.C.Board

Hole Layout




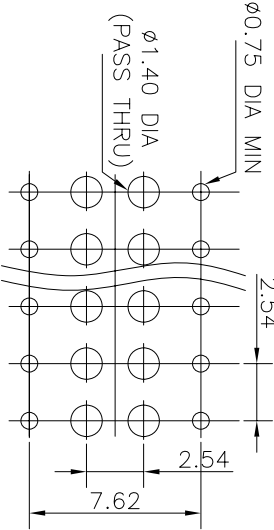


Ordering Information

FHW235 - XX XX A 01

No. of Pins per Row Contact Plating
02~40 01=Tin
02=Gold Flash
Duplex plating
05=Gold Flash /Tin
12=Gold 10u"

02=Gold Flash
Duplex plating
05=Gold Flash /Tin
12=Gold 10u"

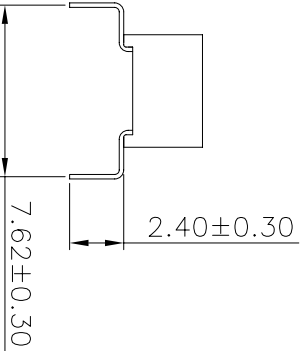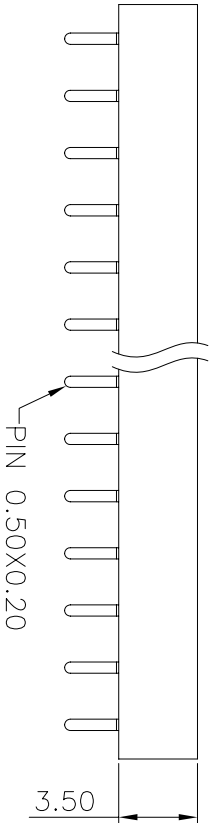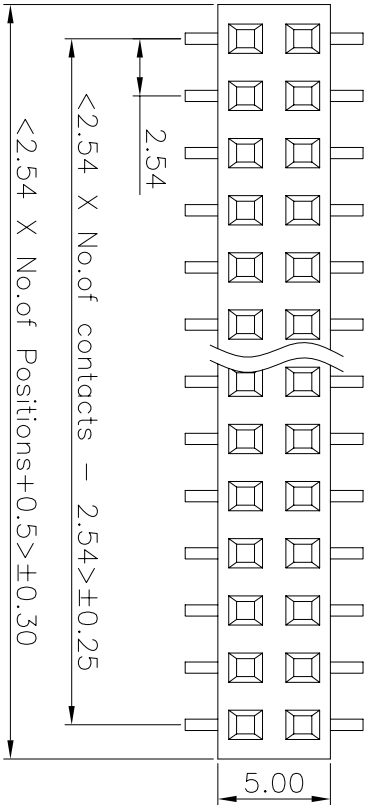

深圳市硕康达科技有限公司
ShenzhenShi Sokcom Technology Co., Ltd

GENERAL TOLERANCE

DESIGN: 邓亮

DATE: 2007.10.10

DWG. NO.

FHW235-A01

TITLE.

2.54 FEMALE HEADER
DUAL ROWS DIP TYPE
BASE 3.50H

REV.	UNIT.	SCALE.	PAGE.	
01	mm	1:1	1/1	

X.* ± 5.0°	X.	± 0.30
X.* ± 3.0°	X	± 0.25
.XX* ± 2.0°	.XX	± 0.15
.XXX* ± 1.0°	.XXX	± 0.10

CHECKED:	DATE:
AUDITED:	DATE:
APPROVED:	DATE:

PART NO.
FHW235-XX XX A01-X