
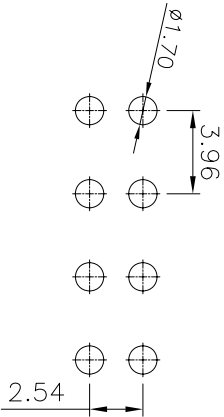

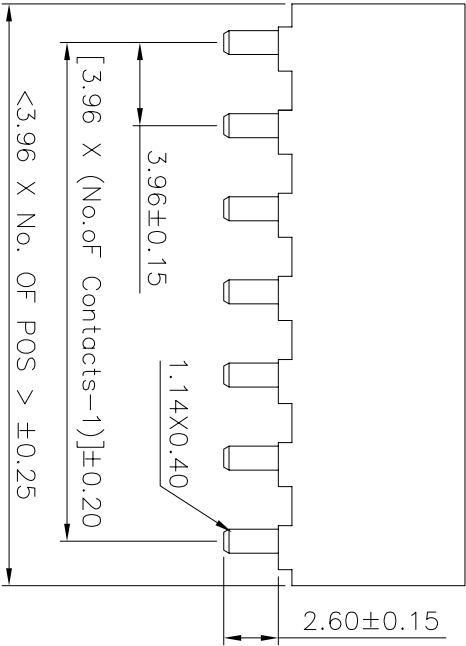



REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2014.04.21	李睿桥



Specifications
Current Rating: 7.9Amp
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding: 1000V AC
Contact Resistance: 30mΩ Max.
Operating Temperature: -40°C to +105°C
Materials
Contact Material: Phosphor Bronze
Insulator Material: Polyester UL94V-0
LCP
All materials must meet Greencomm requirement for environment protection.

Recommended P.C.Boardlayout
(Tolerance:±0.05)

FJD101 - XX XX A 01
No. of Pins per Row Contact Plating
01=Tin
02=Gold Flash
Duplex plating
05=Gold Flash /Tin
...



GENERAL TOLERANCE				DESIGN:	李睿桥	DATE:	2014.04.21	DWG. NO.	FJD101-A01	TITLE:	3.96 PITCH POWER SOCKETS DIP TYPE
X° ± 5.0°	X.	± 0.30	CHECKED:	DATE:							
.X° ± 3.0°	.X	± 0.25	AUDITED:	DATE:				PART NO.			
.XX° ± 2.0°	.XX	± 0.15	APPROVED:	DATE:				FJD101-XX	XXA01		
.XXX° ± 1.0°	.XXX	± 0.10									

REV.	UNIT.	SCALE.	PAGE.	
01	mm	1:1	1/1	