


REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2014.04.21	李睿桥

Ordering Information

FJS101 - XX XX C 01

No. of Pins per Row Contact Plating
02-24 01=Tin
 02=Gold Flash
 Duplex plating
 05=Gold Flash /Tin
 ...

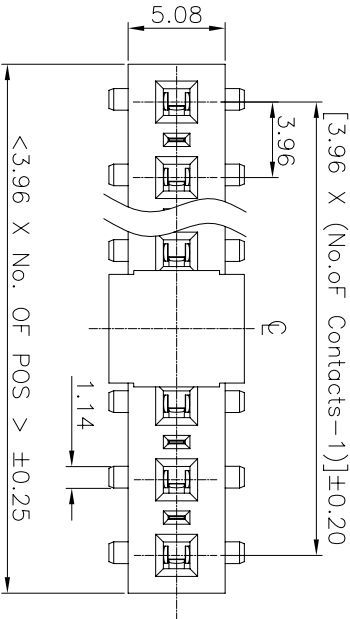


Specifications

Current Rating: 7.9Amp
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding: 1000V AC
Contact Resistance: 30mΩ Max.
Operating Temperature:-40°C to +105°C
Materials

Contact Material: Phosphor Bronze
Insulator Material: Polyester UL94V-0
LCP

All materials must meet Greenconn requirement for environment protection.

Recommended P.C.BoardLayout
(Tolerance:±0.05)

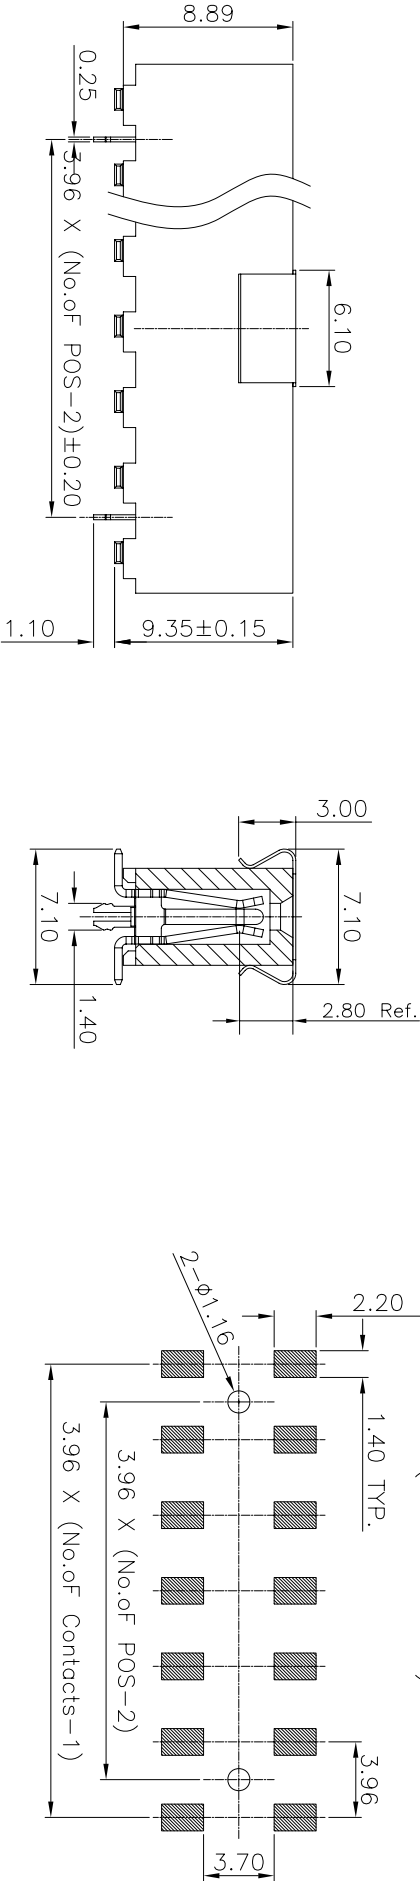

 深圳市硕康达科技有限公司
ShenZhenShi Sokconn Technology Co., Ltd

GENERAL TOLERANCE				DESIGN:	李睿桥	DATE:	2014.04.21	DWG. NO.	FJS101-C01	TITLE:	3.96 PITCH POWER SOCKETS SMT TYPE CONNECTOR
X° ± 5.0°	X.	± 0.30	CHECKED:	DATE:							
X° ± 3.0°	.X	± 0.25	AUDITED:	DATE:							
.XX° ± 2.0°	.XX	± 0.15	APPROVED:	DATE:				PART NO.	FJS101-XX XX C01-XX		
.XXX° ± 1.0°	.XXX	± 0.10									

REV.	UNIT.	SCALE.	PAGE.	
01	mm	1:1	1/1	

A

B

C

D

E

F

A

B

C

D

E

F