


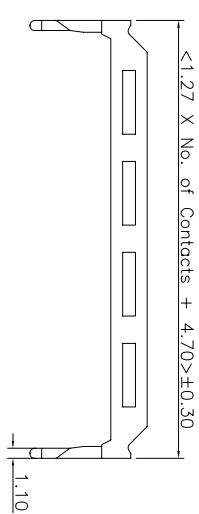
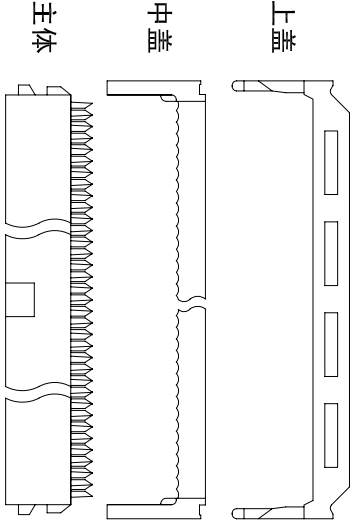
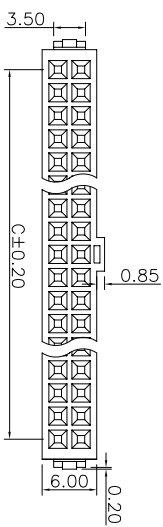

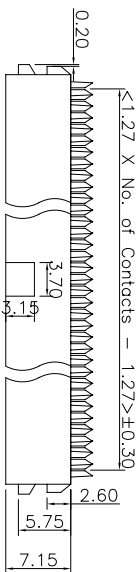


REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2013.07.24	李春桥



Material:
Insulator: PBT+Glass Fiber (UL94V-0).
Contact: Copper Alloy.
Contact Plated: Gold or Tin over Nickel Plated.
Grounding Bar: Copper Alloy with Nickel Plated.
Specification:
Current Rating: 1 Amp.
Withstanding Voltage: AC 500V for 1 Minute.
Insulation Resistance: 100M Ohm Max. at DC 500V.
Contact Resistance: 1 Ohm Max..
Operating Temperature: -40° C ~ +105° C.

Recommended Layout

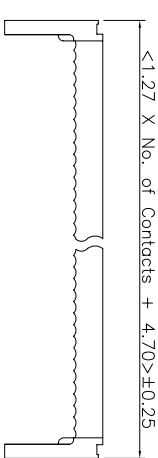

Ordering Information

IDC254 - XX XX U 01
No. of Pins
10~80
Contact Plating
01=Tin
02=Gold Flash
Duplex plating
05=Gold Flash /Tin
...

 深圳市硕康达科技有限公司 ShenZhenShi Sokocom Technology Co., Ltd				GENERAL TOLERANCE		DESIGN: 李春桥		DATE: 2013.07.24		DWG. NO. IDC254-U01		TITLE. 2.54mm IDC Connector Single Contact/with Nose Type
				X.° ± 5.0°		X. ± 0.30		CHECKED:		DATE:		
				.X° ± 3.0°		.X ± 0.25		AUDITED:		DATE:		
				.XX° ± 2.0°		.XX ± 0.15		APPROVED:		DATE:		
				.XXX° ± 1.0°		.XXX ± 0.10						
REV. 01	UNIT. mm	SCALE. 1:1	PAGE. 1/1									