

REV.	LOOAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2007.08.02	张荣

Specifications

Current Rating: 0.5Amp
Insulation Resistance: 1000M Ω Min.
Dielectric Withstanding: 300V AC/DC
Contact Resistance: 20m Ω Max.
Operating Temperature: -40°C to +105°C Materials
Contact Material: Phosphor Bronze
Insulation Material: Polyester, UL 94V-0

All materials must be GP materials
Nylon-9T





Ordering Information

MBS241 - XX XX B 01

No. of Pins per Row
04~25

Contact Plating
01=Tin
02=Gold Flash
Duplex Plating
05=Gold Flash/Tin
11=15u" Gold Flash Standard
Duplex Plating
55=15u" Gold Flash/Tin
...

RECOMMENDED P.C.B LAYOUT

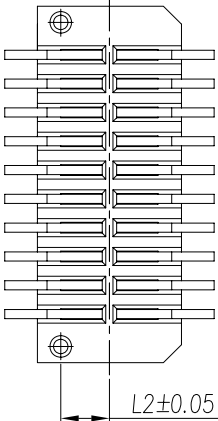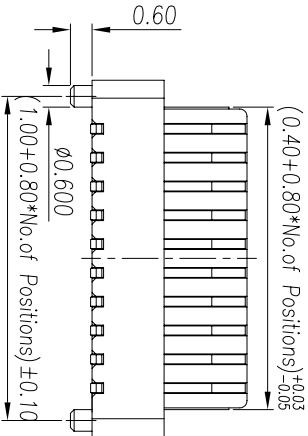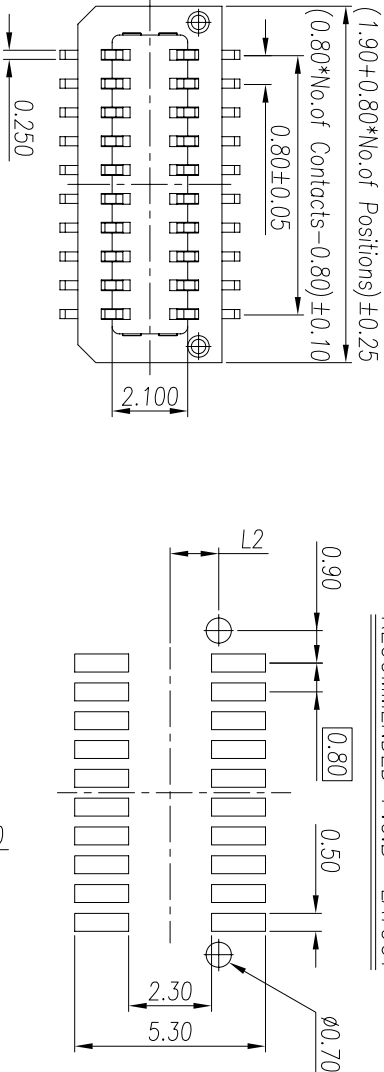

F/M ASSEM HEIGHT	PART NO.	L	L1	L2
4.50H	MBS241-XX XX B01	3.30	1.80	1.350



深圳市硕康达科技有限公司
ShenzhenShi Sokoon Technology Co., Ltd

GENERAL TOLERANCE

DESIGN: 张荣

DATE: 2007.08.02

DWG. NO.

MBS241-B01

TITLE.

0.80 BOARD TO BOARD
MALE ASSEMBLY

X. ± 5.0°

X. ± 3.0°

CHECKED:

DATE:

PART NO.

MBS241-XX XX B01

TITLE.

0.80 BOARD TO BOARD
MALE ASSEMBLY

.XX ± 2.0°

.XX ± 0.15

AUDITED:

DATE:

PART NO.

MBS241-XX XX B01

TITLE.

0.80 BOARD TO BOARD
MALE ASSEMBLY

.XXX ± 1.0°

.XXX ± 0.10

APPROVED:

DATE:

PART NO.

MBS241-XX XX B01

TITLE.

0.80 BOARD TO BOARD
MALE ASSEMBLY

.XXX ± 1.0°

.XXX ± 0.10

APPROVED:

DATE:

PART NO.

MBS241-XX XX B01

TITLE.

0.80 BOARD TO BOARD
MALE ASSEMBLY

.XXX ± 1.0°

.XXX ± 0.10

APPROVED:

DATE:

PART NO.

MBS241-XX XX B01

TITLE.

0.80 BOARD TO BOARD
MALE ASSEMBLY

.XXX ± 1.0°

.XXX ± 0.10

APPROVED:

DATE:

PART NO.

MBS241-XX XX B01

TITLE.

0.80 BOARD TO BOARD
MALE ASSEMBLY

.XXX ± 1.0°

.XXX ± 0.10

APPROVED:

DATE:

PART NO.

MBS241-XX XX B01

TITLE.

0.80 BOARD TO BOARD
MALE ASSEMBLY

.XXX ± 1.0°

.XXX ± 0.10

APPROVED:

DATE:

PART NO.

MBS241-XX XX B01

TITLE.

0.80 BOARD TO BOARD
MALE ASSEMBLY

.XXX ± 1.0°

.XXX ± 0.10

APPROVED:

DATE:

PART NO.

MBS241-XX XX B01

TITLE.

0.80 BOARD TO BOARD
MALE ASSEMBLY

.XXX ± 1.0°

.XXX ± 0.10

APPROVED:

DATE:

PART NO.

MBS241-XX XX B01

TITLE.

0.80 BOARD TO BOARD
MALE ASSEMBLY

.XXX ± 1.0°

.XXX ± 0.10

APPROVED:

DATE:

PART NO.

MBS241-XX XX B01

TITLE.

0.80 BOARD TO BOARD
MALE ASSEMBLY

.XXX ± 1.0°

.XXX ± 0.10

APPROVED:

DATE:

PART NO.

MBS241-XX XX B01

TITLE.

0.80 BOARD TO BOARD
MALE ASSEMBLY

.XXX ± 1.0°

.XXX ± 0.10

APPROVED:

DATE:

PART NO.

MBS241-XX XX B01

TITLE.

0.80 BOARD TO BOARD
MALE ASSEMBLY

.XXX ± 1.0°

.XXX ± 0.10

APPROVED:

DATE:

PART NO.

MBS241-XX XX B01

TITLE.

0.80 BOARD TO BOARD
MALE ASSEMBLY

.XXX ± 1.0°

.XXX ± 0.10

APPROVED:

DATE:

PART NO.

MBS241-XX XX B01

TITLE.

0.80 BOARD TO BOARD
MALE ASSEMBLY

.XXX ± 1.0°

.XXX ± 0.10

APPROVED:

DATE:

PART NO.

MBS241-XX XX B01

TITLE.

0.80 BOARD TO BOARD
MALE ASSEMBLY

.XXX ± 1.0°

.XXX ± 0.10

APPROVED:

DATE:

PART NO.

MBS241-XX XX B01

TITLE.

0.80 BOARD TO BOARD
MALE ASSEMBLY

.XXX ± 1.0°

.XXX ± 0.10

APPROVED:

DATE:

PART NO.

MBS241-XX XX B01

TITLE.

0.80 BOARD TO BOARD
MALE ASSEMBLY

.XXX ± 1.0°

.XXX ± 0.10

APPROVED:

DATE:

PART NO.

MBS241-XX XX B01

TITLE.

0.80 BOARD TO BOARD
MALE ASSEMBLY

.XXX ± 1.0°

.XXX ± 0.10

APPROVED:

DATE:

PART NO.

MBS241-XX XX B01

TITLE.

0.80 BOARD TO BOARD
MALE ASSEMBLY

.XXX ± 1.0°

.XXX ± 0.10

APPROVED:

DATE:

PART NO.

MBS241-XX XX B01

TITLE.

0.80 BOARD TO BOARD
MALE ASSEMBLY

.XXX ± 1.0°

.XXX ± 0.10

APPROVED:

DATE:

PART NO.

MBS241-XX XX B01

TITLE.

0.80 BOARD TO BOARD
MALE ASSEMBLY

.XXX ± 1.0°

.XXX ± 0.10

APPROVED:

DATE:

PART NO.

MBS241-XX XX B01

TITLE.

0.80 BOARD TO BOARD
MALE ASSEMBLY

.XXX ± 1.0°

.XXX ± 0.10

APPROVED:

DATE:

PART NO.

MBS241-XX XX B01

TITLE.

0.80 BOARD TO BOARD
MALE ASSEMBLY

.XXX ± 1.0°

.XXX ± 0.10

APPROVED:

DATE:

PART NO.

MBS241-XX XX B01

TITLE.

0.80 BOARD TO BOARD
MALE ASSEMBLY

.XXX ± 1.0°

.XXX ± 0.10

APPROVED:

DATE:

PART NO.

MBS241-XX XX B01

TITLE.

0.80 BOARD TO BOARD
MALE ASSEMBLY

.XXX ± 1.0°

.XXX ± 0.10

APPROVED:

DATE:

PART NO.

MBS241-XX XX B01

TITLE.

0.80 BOARD TO BOARD
MALE ASSEMBLY

.XXX ± 1.0°

.XXX ± 0.10

APPROVED:

DATE:

PART NO.

MBS241-XX XX B01

TITLE.

0.80 BOARD TO BOARD
MALE ASSEMBLY

.XXX ± 1.0°

.XXX ± 0.10

APPROVED:

DATE:

PART NO.

MBS241-XX XX B01

TITLE.

0.80 BOARD TO BOARD
MALE ASSEMBLY

.XXX ± 1.0°

.XXX ± 0.10

APPROVED:

DATE:

PART NO.

MBS241-XX XX B01

TITLE.

0.80 BOARD TO BOARD
MALE ASSEMBLY

.XXX ± 1.0°

.XXX ± 0.10

APPROVED:

DATE:

PART NO.

MBS241-XX XX B01

TITLE.

0.80 BOARD TO BOARD
MALE ASSEMBLY

.XXX ± 1.0°

.XXX ± 0.10

APPROVED:

DATE:

PART NO.

MBS241-XX XX B01

TITLE.

0.80 BOARD TO BOARD
MALE ASSEMBLY

.XXX ± 1.0°

.XXX ± 0.10

APPROVED:

DATE:

PART NO.

MBS241-XX XX B01

TITLE.

0.80 BOARD TO BOARD
MALE ASSEMBLY

.XXX ± 1.0°

.XXX ± 0.10

APPROVED:

DATE:

PART NO.

MBS241-XX XX B01

TITLE.

0.80 BOARD TO BOARD
MALE ASSEMBLY

.XXX ± 1.0°

.XXX ± 0.10

APPROVED:

DATE:

PART NO.

MBS241-XX XX B01

TITLE.

0.80 BOARD TO BOARD
MALE ASSEMBLY

.XXX ± 1.0°

.XXX ± 0.10

APPROVED:

DATE:

PART NO.

MBS241-XX XX B01

TITLE.

0.80 BOARD TO BOARD
MALE ASSEMBLY

.XXX ± 1.0°

.XXX ± 0.10

APPROVED:

DATE:

PART NO.

MBS2