


REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2007.11.21	张 荣

Recommended P.C.Board

Hole Layout

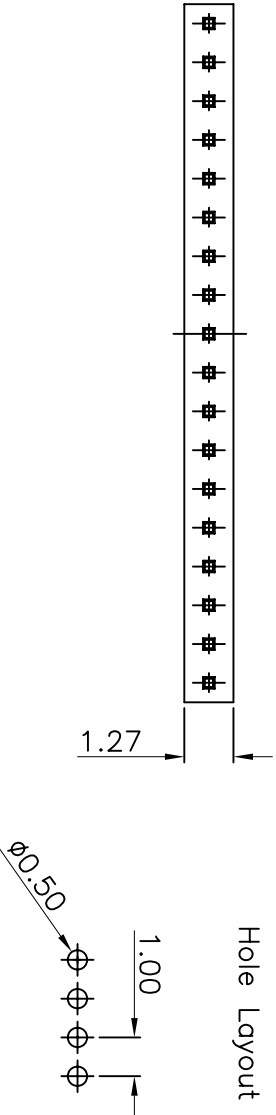

Specifications


Current Rating: 1Amp
Insulation Resistance: 500MΩ Min.
Dielectric Withstanding: 600VAC
Contact Resistance: 20mΩ Max.
Operating Temperature: -40°C to +105°C

Materials

Contact Material: Brass
Insulator Material: Polyester, UL 94V-0
NYLON-6T
All materials must be GP materials

Ordering Information

MCD102 - XX XX A 01 - X
No. of Pins per Row Contact Plating
02~50
Options
01=Tin
02=Gold Flash
Duplex plating
05=Gold Flash /Tin
PT=CAP+T&R

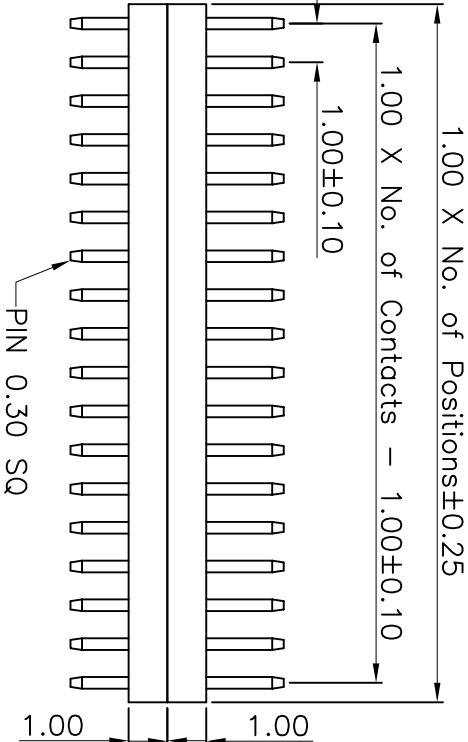

深圳市硕康达科技有限公司
Shenzhen Shi Sokcomm Technology Co., Ltd

REV.	UNIT.	SCALE.	PAGE.
01	mm	3:1	1/1

GENERAL TOLERANCE			DESIGN:	张 荣	DATE:	2007.11.21
X' ± 5"	X.	± 0.30	CHECKED:		DATE:	
X' ± 2"	X.	± 0.20	AUDITED:		DATE:	
.XX' ± 1"	.XX	± 0.15	APPROVED:		DATE:	
.XXX' ± 0.5"	.XXX	± 0.10				

DWG. NO.	TITLE.
MCD102-A01	1.00 PIN HEADER
PART NO.	SINGLE ROW DIP TYPE
MCD102-XX XX A01-X	BASE 2.00H