

REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2011.09.16	尹 晖

Specifications


Current Rating: 1Amp
Insulation Resistance: 500MΩ Min.
Dielectric Withstanding: 600VAC
Contact Resistance: 20mΩ Max.
Operating Temperature:-40°C to +105°C

Materials

Contact Material: Brass
Insulator Material: Polyester, UL 94V-0
NYLON-6T
All materials must be GP materials

Recommended P.C.Board




Hole Layout



Ordering Information

MCD102 - XX XX A 02

No. of Pins per Row Contact Plating
01=Tin
02=Gold Flash
Duplex plating
05=Gold Flash /Tin
...

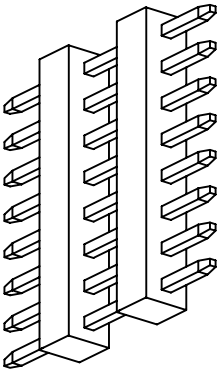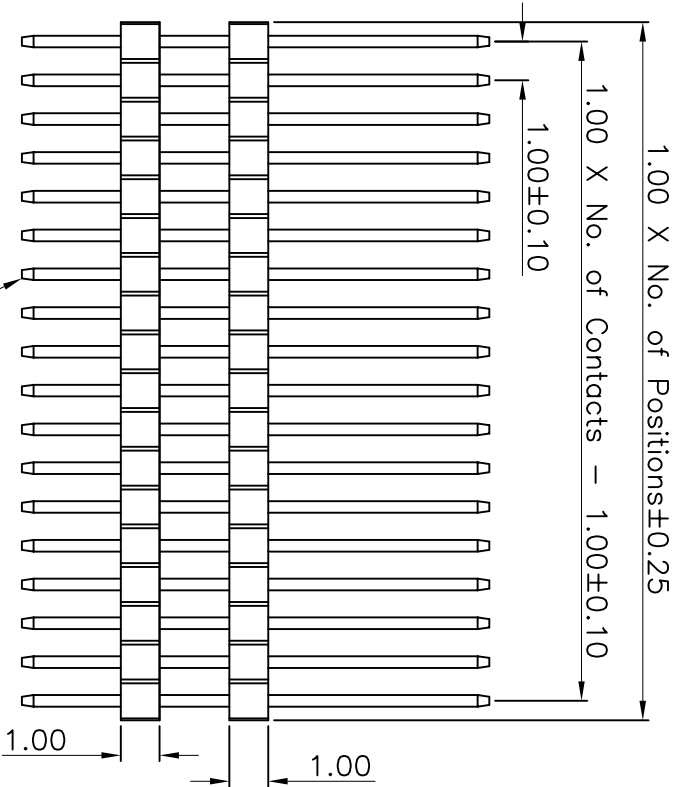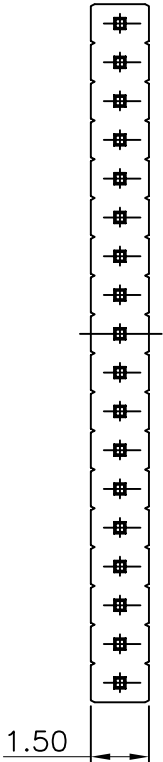

深圳市硕康达科技有限公司
ShenzhenShi Sokcom Technology Co., Ltd

GENERAL TOLERANCE			
X* ± 5°	X. ± 0.30		
X* ± 2°	X. ± 0.20		
.XX* ± 1°	.XX ± 0.15		
.XXX* ± 0.5°	.XXX ± 0.10		

DESIGN:	尹 晖	DATE:	2011.09.16
CHECKED:		DATE:	
AUDITED:		DATE:	
APPROVED:		DATE:	

DWG. NO.	MCD102-A02
PART NO.	MCD102-XX XX A02-X

TITLE:	1.00 PIN HEADER SINGLE ROW DIP TYPE BASE 2.00H
--------	--

REV.	UNIT.	SCALE.	PAGE.
01	mm	3:1	1/1

