


REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2007.11.21	张 荣

Recommended P.C.Board

Hole Layout



Specifications



Current Rating: 1Amp
Insulation Resistance: 500MΩ Min.
Dielectric Withstanding: 600VAC
Contact Resistance: 20mΩ Max.
Operating Temperature: -40°C to +105°C

Materials

Contact Material: Brass
Insulator Material: Polyester, UL 94V-0
NYLON-6T
All materials must be GP materials

Ordering Information

MCD201 - XX XX A 01 - X
No. of Pins per Row Contact Plating
02~50 01=Tin
02=Gold Flash
Duplex plating
05=Gold Flash /Tin
Options
P=CAP
T=T&R
PT=CAP+T&R

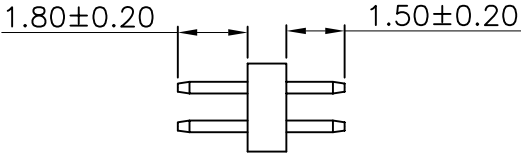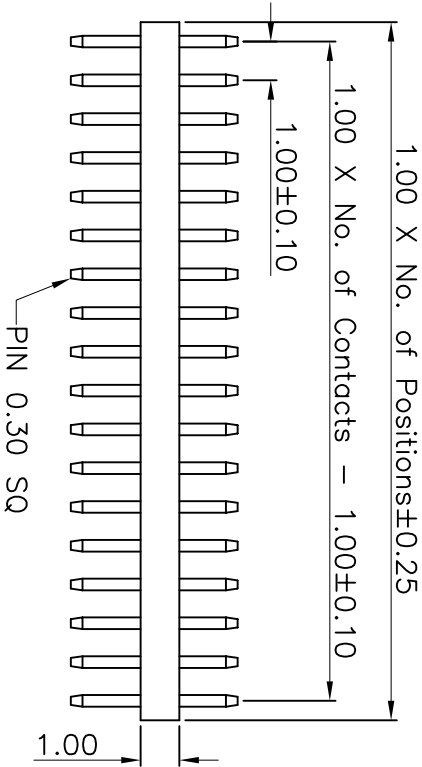

深圳市硕康达科技有限公司
ShenZhenShi Sokcomm Technology Co., Ltd

GENERAL TOLERANCE

X* ± 5°	X. ± 0.30
X* ± 2°	X. ± 0.20
.XX* ± 1°	.XX ± 0.15
.XXX ± 0.5°	.XXX ± 0.10

DESIGN: 张 荣

DATE: 2007.11.21

CHECKED:

DATE:

AUDITED:

DATE:

APPROVED:

DATE:

DWG. NO.

MCD201-A01

TITLE.

1.00 PIN HEADER
DUAL ROWS DIP TYPE
BASE 1.00H

REV.

01

UNIT.

mm

SCALE.

3:1

PAGE.

1/1

