
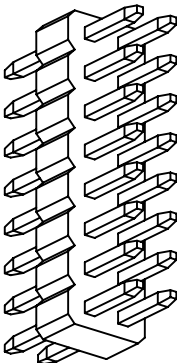


REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2007.11.21	张荣



Specifications

Current Rating: 1Amp

Insulation Resistance: 500MΩ Min.

Dielectric Withstanding: 600VAC

Contact Resistance: 20mΩ Max.

Operating Temperature: -40°C to +105°C

Materials

Contact Material: Brass


Insulator Material: Polyester, UL 94V-0

NYLON-6T

All materials must be GP materials

Recommended P.C.Board

Hole Layout



Ordering Information

MCD201 - XX XX A 02

No. of Pins per Row Contact Plating
01=Tin
02=Gold Flash
05=Gold Flash /Tin
...
02~50

Duplex plating



深圳市硕康达科技有限公司
Shenzhen Shi Sokcorn Technology Co., Ltd

GENERAL TOLERANCE

DESIGN:

张荣

DATE: 2007.11.21

DWG. NO.

MCD201-A02

TITLE:

1.00 PIN HEADER

REV.

01 UNIT.
mm

SCALE.

PAGE.



X. ± 5°
X. ± 2°
X. ± 1°
.XX ± 0.5°
.XXX ± 0.10

X. ± 0.30
X. ± 0.20
X. ± 0.15
XXX ± 0.10

CHECKED:

AUDITED:

DATE:

PART NO.

MCD201-XX XX A02

DUAL ROWS DIP TYPE

BASE 1.00H