



REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2011.12.26	尹 晖

Specifications

Current Rating: 1Amp
Insulation Resistance: 500MΩ Min.
Dielectric Withstanding: 600VAC
Contact Resistance: 20mΩ Max.
Operating Temperature: -40°C to +105°C


Materials

Contact Material: Brass
Insulator Material: Polyester, UL 94V-0
NYLON-6T
All materials must be GP materials

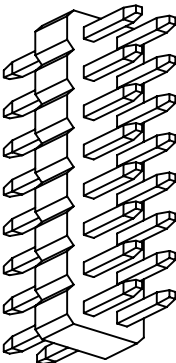

Recommended P.C.Board

Hole Layout





Ordering Information

MCD201 - XX XX A 03

No. of Pins per Row Contact Plating
01=Tin
02=Gold Flash
05=Gold plating
Duplex plating

05=Gold Flash /Tin
...

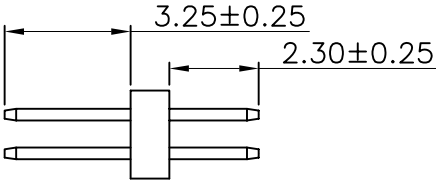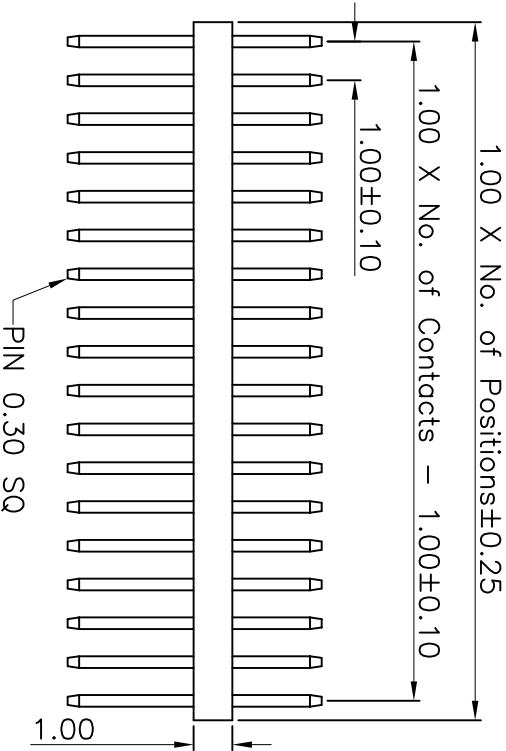

深圳市硕康达科技有限公司
ShenzhenShi Sokcom technology Co., Ltd

GENERAL TOLERANCE

DESIGN: 尹 晖

DATE: 2011.12.26

DWG. NO.

MCD201-A03

TITLE.

1.00 PIN HEADER

REV.

01 UNIT. mm

SCALE. 3:1

PAGE. 1/1



.XX ± 1°
.XX ± 0.5°
.XX ± 0.10

X ± 5°

X ± 0.30

CHECKED:

DATE:

X ± 2°

X ± 0.20

AUDITED:

DATE:

PART NO.

MCD201-XX XX A03

DUAL ROWS DIP TYPE

BASE 1.00H