





REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2007.11.21	张 荣

Specifications


Current Rating: 1Amp
Insulation Resistance: 500MΩ Min.
Dielectric Withstanding: 600VAC
Contact Resistance: 20mΩ Max.
Operating Temperature: -40°C to +105°C

Materials

Contact Material: Brass
Insulator Material: Polyester, UL 94V-0
NYLON-6T
All materials must be GP materials

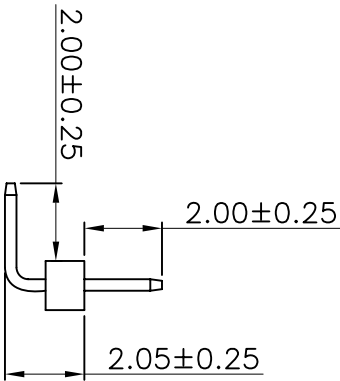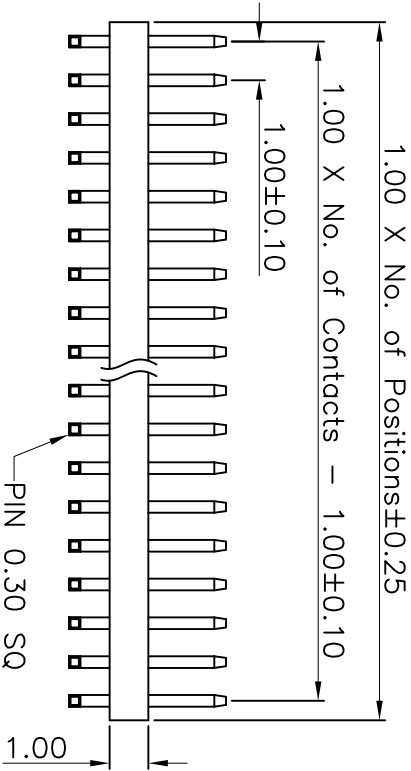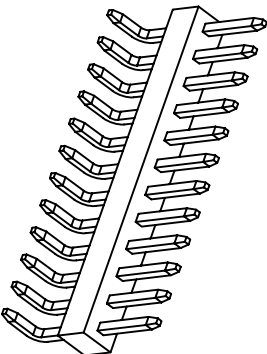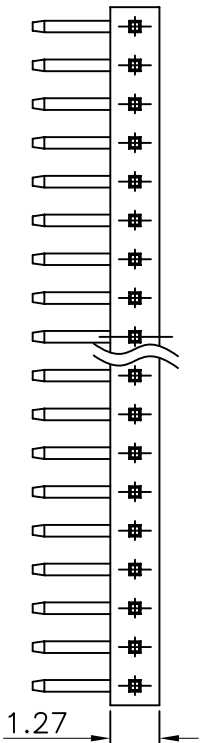

Recommended P.C.Board
Hole Layout

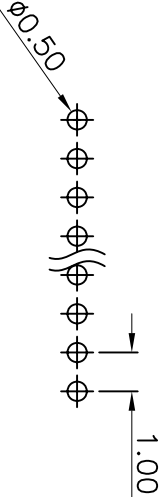

Ordering Information

MCR101 - XX XX A 01

No. of Pins per Row Contact Plating
01=Tin
02=Gold Flash
Duplex plating
05=Gold Flash /Tin
...

Sokcomm Professional Connector Manufacturer 深圳市硕康达科技有限公司 ShenzhenShi Sokcomm Technology Co., Ltd					GENERAL TOLERANCE		DESIGN: 张 荣	DATE: 2007.11.21	DWG. NO. MCR101-A01	TITLE. 1.00 FEMALE HEADER SINGLE ROW R/A TYPE BASE 1.00H
REV. 01	UNIT. mm	SCALE. 3:1	PAGE. 1/1		X. ± 5°	K. ± 0.30	CHECKED:	DATE:		
					X. ± 2°	X. ± 0.20	AUDITED:	DATE:		
					.XX ± 1°	.XX ± 0.15	APPROVED:	DATE:		
					.XXX ± 0.5°	.XXX ± 0.10				
					PART NO. MCR101-XX XX A01					