REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2007.12.14	张 荣

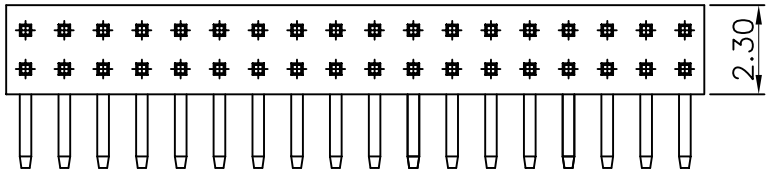

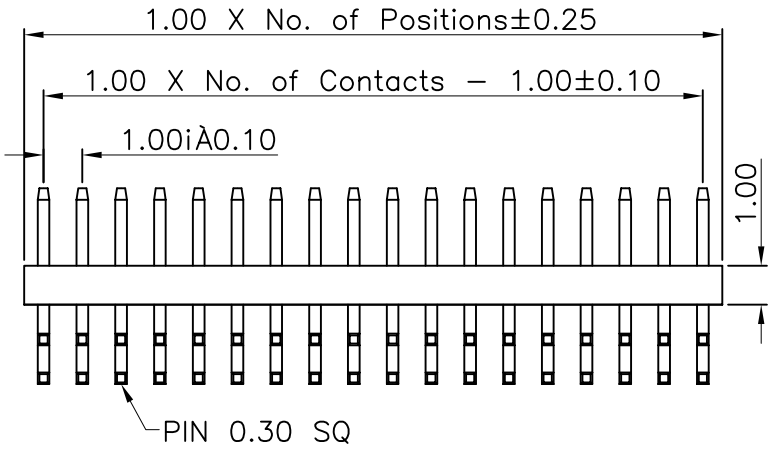

Recommended P.C.Board

Hole Layout

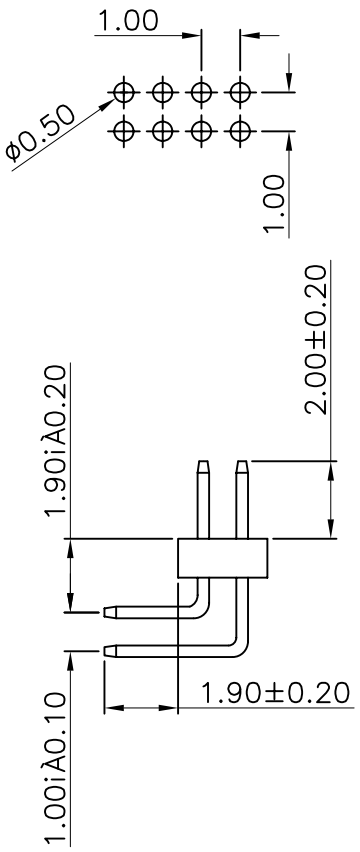

Specifications

Current Rating: 1Amp
Insulation Resistance: 500MΩ Min.
Dielectric Withstanding: 600VAC
Contact Resistance: 20mΩ Max.
Operating Temperature:–40°C to +105°C

Materials

Contact Material: Brass
Insulator Material: Polyester, UL 94V–0
NYLON–6T
All materials must be GP materials

Ordering Information

MCR201 – XX XX A 01 – X

- XX: No. of Pins per Row 02~50
- XX: Contact Plating
  - 01=Tin
  - 02=Gold Flash
  - Duplex plating
  - 05=Gold Flash /Tin
  - ...
- X: Options
  - P=CAP
  - T=T&R
  - PT=CAP+T&R

深圳市硕康达科技有限公司
ShenZhenShi Sokconn Technology Co.,Ltd

GENERAL TOLERANCE	
X.° ± 5°	X. ± 0.30
.X° ± 2°	.X ± 0.20
.XX° ± 1°	.XX ± 0.15
.XXX° ± 0.5°	.XXX ± 0.10

REV.	UNIT.	SCALE.	PAGE.
01	mm	3:1	1/1

DESIGN: 张 荣	DATE: 2007.12.14	DWG. NO. MCR201–A01	TITLE. 1.00 PIN HEADER SINGLE ROW R/A TYPE BASE 1.00H
CHECKED:	DATE:		
AUDITED:	DATE:	PART NO. MCR201–XX XX A01–X	
APPROVED:	DATE:		