

REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2011.12.02	尹 晖

Specifications


Current Rating: 1Amp
Insulation Resistance: 500MΩ Min.
Dielectric Withstanding: 600VAC
Contact Resistance: 20mΩ Max.
Operating Temperature: -40°C to +105°C

Materials

Contact Material: Brass
Insulator Material: Polyester, UL 94V-0 LCP
All materials must be GP materials

Recommended P.C.Board

Hole Layout




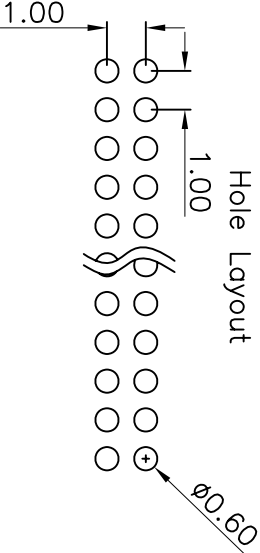


Ordering Information

MCR201 - XX XX A 02

No. of Pins per Row Contact Plating
01=Tin
02=Gold Flash
05=Gold Flash /Tin

Duplex plating
05=Gold Flash /Tin
...

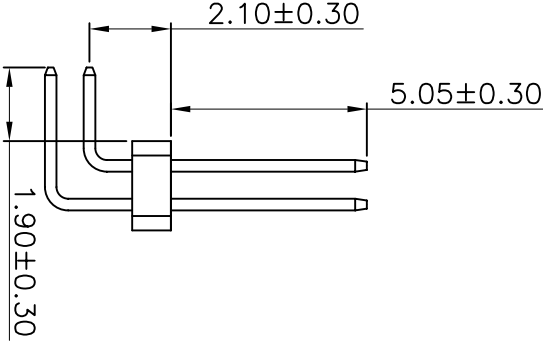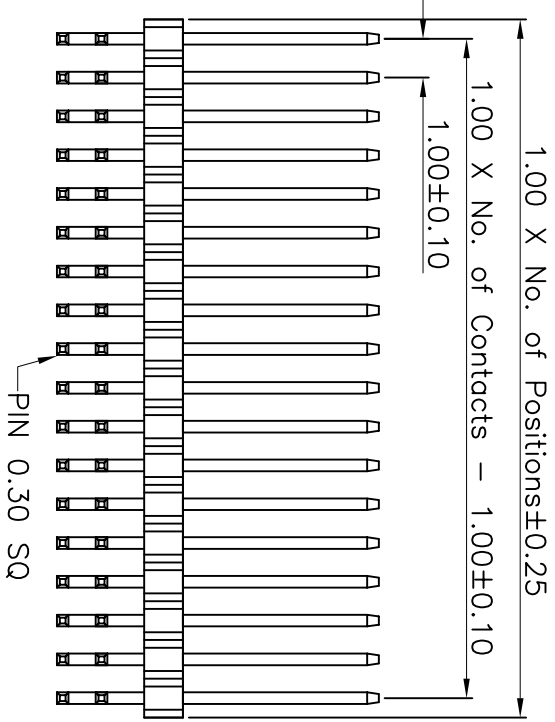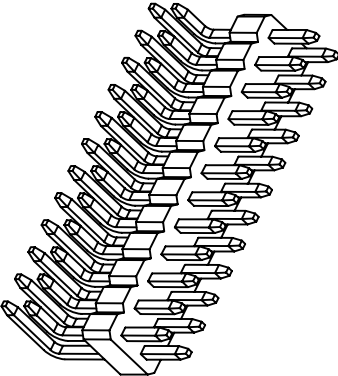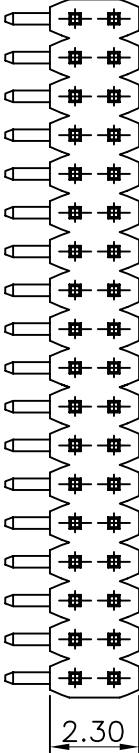

深圳市硕康达科技有限公司
ShenZhenShi Sokcom Technology Co., Ltd

GENERAL TOLERANCE

DESIGN: 尹 晖

DATE: 2011.12.02

DWG. NO.

MCR201-A02

TITLE:

1.00 PIN HEADER

REV.

01 UNIT. mm

SCALE. 3:1

PAGE. 1/1



X. ± 5° X. ± 0.30
X. ± 2° X. ± 0.20
X. ± 1° X. ± 0.15
X. ± 0.5° X. ± 0.10

CHECKED:

DATE:

PART NO.

MCR201-XX XX A02

DUAL ROWS R/A TYPE
BASE 1.50H