

REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2007.11.21	张 荣

Specifications


Current Rating: 1Amp
Insulation Resistance: 500MΩ Min.
Dielectric Withstanding: 600VAC
Contact Resistance: 20mΩ Max.
Operating Temperature: -40°C to +105°C

Materials

Contact Material: Brass
Insulator Material: Polyester, UL 94V-0 LCP
All materials must be GP materials

Recommended P.C.Board

Hole Layout




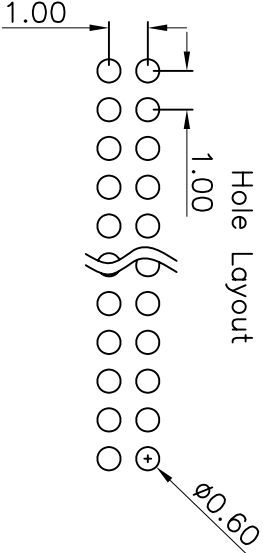


Ordering Information

MCR201 - XX XX A 01

No. of Pins per Row Contact Plating
01=Tin
02=Gold Flash
05=Gold Flash /Tin

Duplex plating
05=Gold Flash /Tin
...

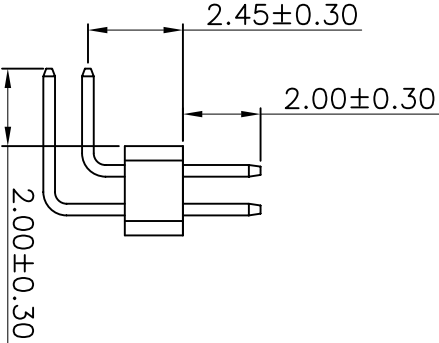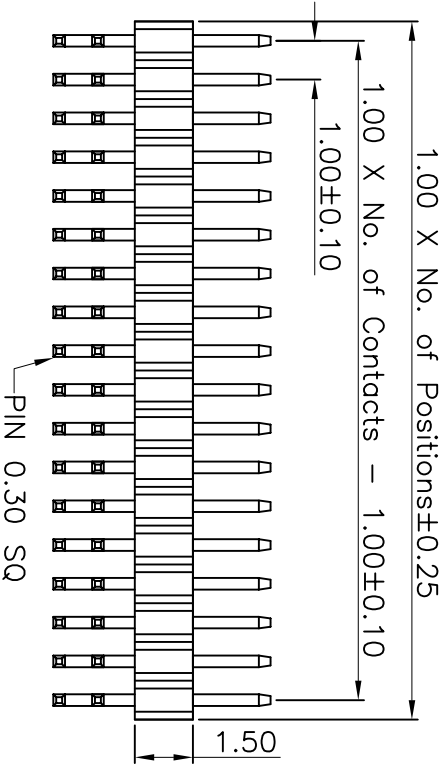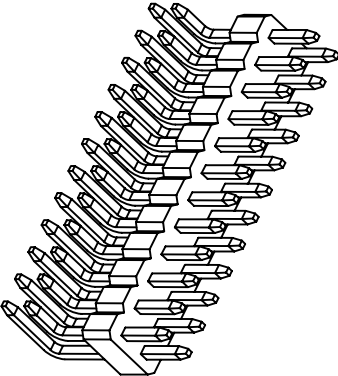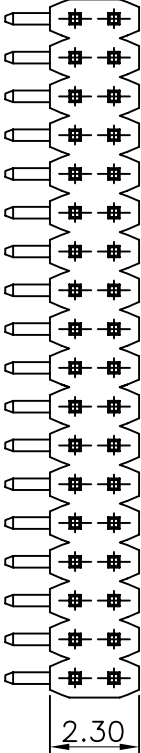

深圳市硕康达科技有限公司
ShenZhenShi Sokconn Technology Co., Ltd

GENERAL TOLERANCE

DESIGN: 张 荣

DATE: 2007.11.21

DWG. NO.

MCR201-A01

TITLE:

1.00 PIN HEADER

REV.

01 UNIT. mm

SCALE. 3:1

PAGE. 1/1



X. ± 5° X. ± 0.30
X. ± 2° X. ± 0.20
.XX ± 1° .XX ± 0.15
.XXX ± 0.5° .XXX ± 0.10

CHECKED:

AUDITED:

DATE:

DATE:

PART NO.

MCR201-XX XX A01

DATE:

DUAL ROWS R/A TYPE
BASE 1.50H