


REV.	LOOPS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2011.06.20	宋辉

Specifications

Current Rating: 1Amp
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding: 300V AC
Contact Resistance: 20mΩ Max.
Operating Temperature: -40°C to +105°C

Materials

Contact Material: Brass
Insulation Material: Polyester, UL 94V-0
NYLON-6T
All materials must be GP materials

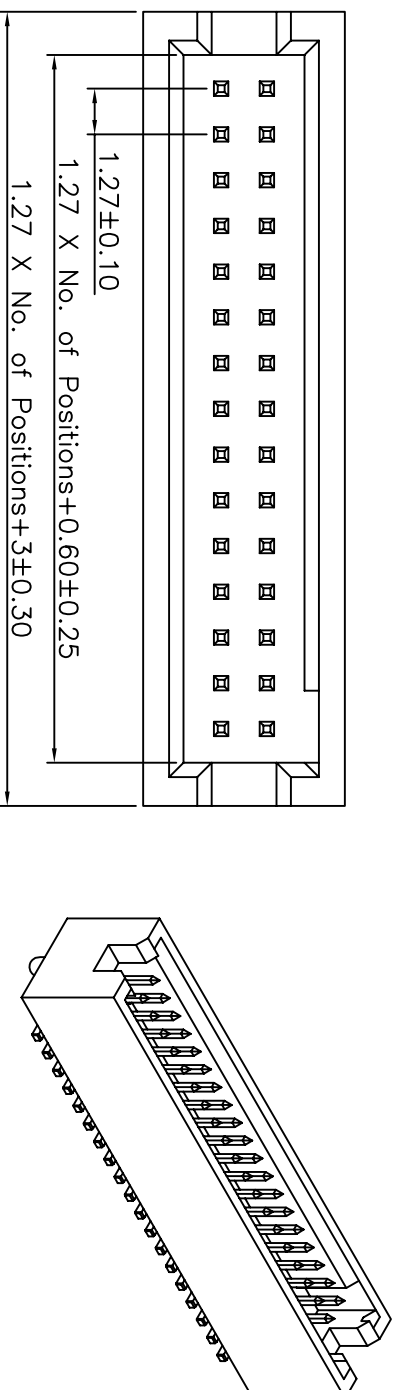


1.27 X No. of Positions+0.60±0.25

1.27±0.10

1.27 X No. of Positions+3±0.30




RECOMMENDED P.C.B LAYOUT

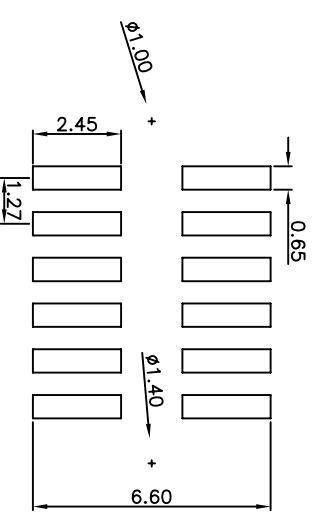

Ordering Information

MEB201 - XX XX B 02

No. of Pins per Row Contact Plating A/无柱 No. of
01~50 01=Tin B/有柱 Pins/Row
02=Gold Flash
Duplex Plating
05=Gold Flash /Tin
...

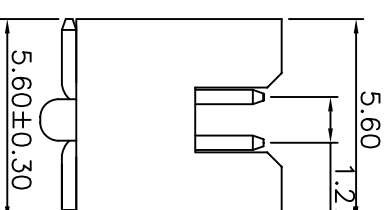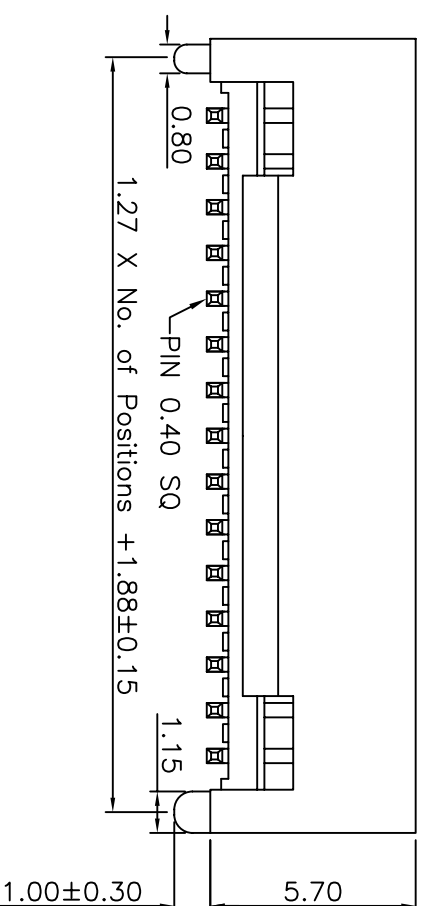

GENERAL TOLERANCE

DESIGN: 宋辉

DATE: 2011.06.20

DWG. NO.

MEB201-B02

TITLE:

1.27 BOX HEADER

X. ± 5.0"	X. ± 0.30
X. ± 3.0"	X. ± 0.25
.XX ± 2.0"	.XX ± 0.15
.XXX ± 1.0"	.XXX ± 0.10

CHECKED:

DATE:

AUDITED:

DATE:

APPROVED:

DATE:

PART NO.

MEB201-XX XX B02

DUAL ROW SMT TYPE

BASE H5.40



深圳市硕康达科技有限公司
Shenzhen Sokcomm Technology Co., Ltd

REV.

01

UNIT.

mm

SCALE.

1:1

PAGE.

1/1



1

2

3

4

5

6

7

8

9