
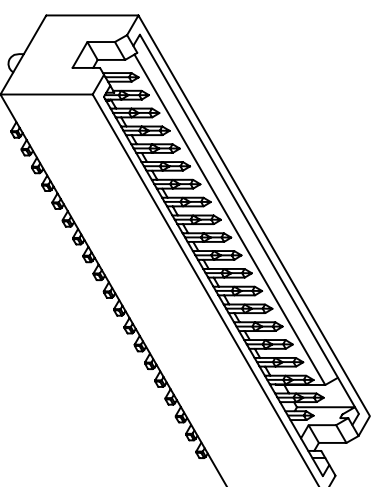



REV.	LOOPS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2011.06.20	宋辉

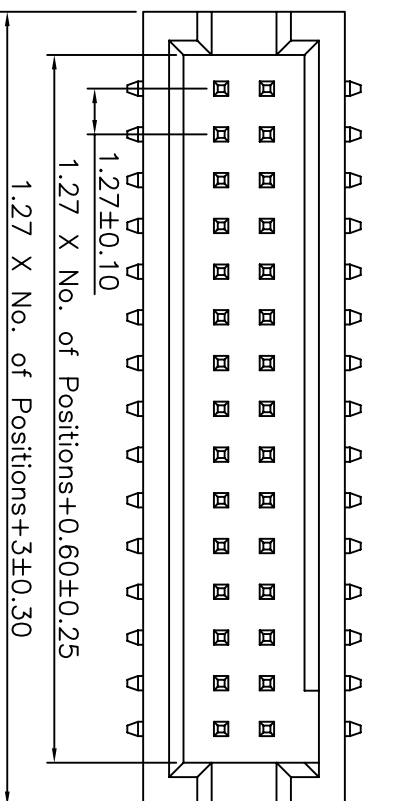

Specifications
 Current Rating: 1Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 300V AC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C

Materials
 Contact Material: Brass
 Insulation Material: Polyester, UL 94V-0
 NYLON-6T
 All materials must be GP materials



RECOMMENDED P.C.B LAYOUT

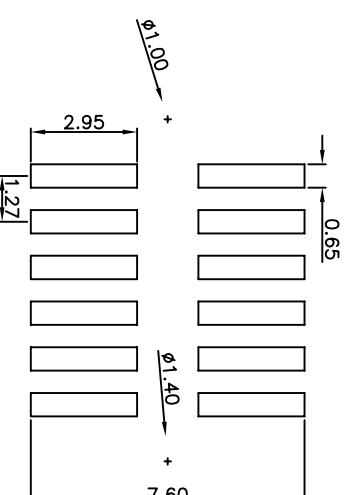

Ordering Information

MEB201 - XX XX B 03

No. of Pins per Row Contact Plating A/无柱
 05~50 01=Tin B/有柱
 02=Gold Flash
 Duplex Plating 05=Gold Flash /Tin
 ...

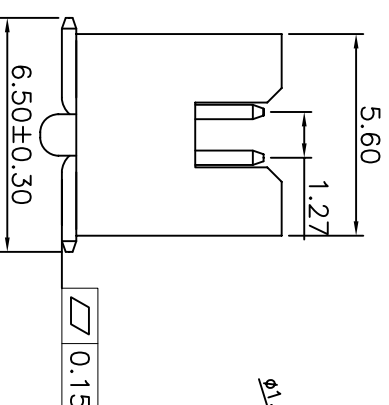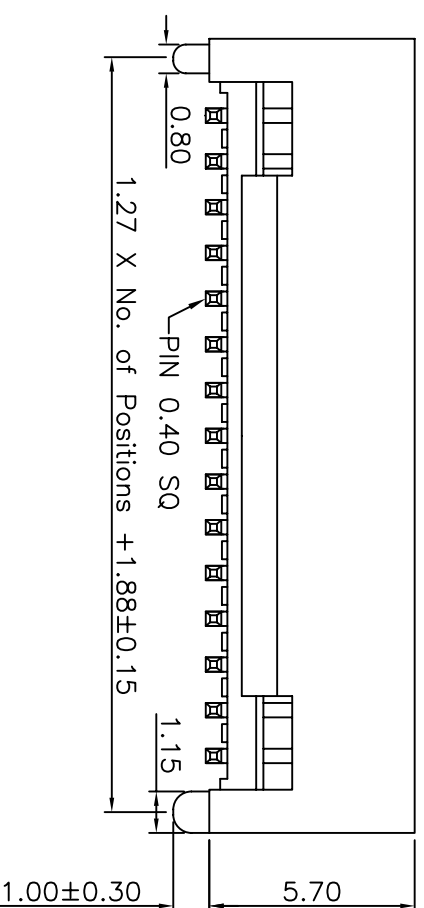

深圳市硕康达科技有限公司
 ShenzhenShi Sokcom Technology Co., Ltd

GENERAL TOLERANCE				DESIGN: 宋辉		DWG. NO. MEB201-B03		TITLE. 1.27 BOX HEADER	
X. ± 5.0"	X.	± 0.30	CHECKED:	DATE: 2011.06.20					
X. ± 3.0"	X	± 0.25	AUDITED:	DATE:		PART NO.		DUAL ROW SMT TYPE	
.XX ± 2.0"	.XX	± 0.15	APPROVED:	DATE:		MEB201-XX XX B03		BASE H5.40	
.XXX ± 1.0"	.XXX	± 0.10							

REV.	UNIT.	SCALE.	PAGE.	
01	mm	1:1	1/1	