

REV.	LOOPS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2007.11.07	张荣


Recommended P.C.Board

Specifications

Current Rating: 1Amp
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding: 300V AC
Contact Resistance: 20mΩ Max.
Operating Temperature: -40°C to +105°C

Hole Layout

(Tolerance: ±0.05)





Materials

Contact Material: Brass

Insulation Material: Polyester, UL 94V-0

NYLON-6T

All materials must be GP materials

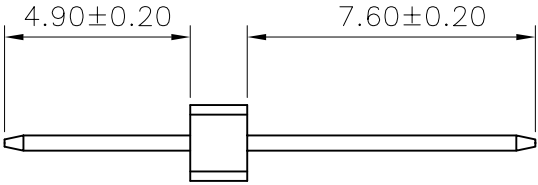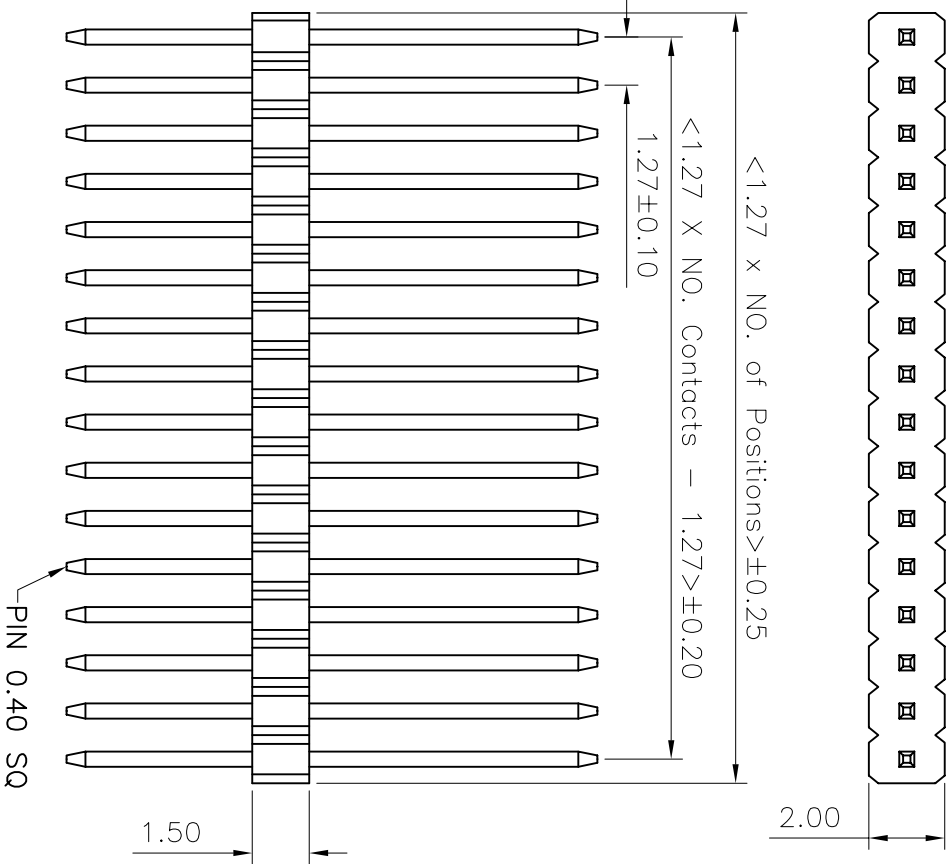

Ordering Information

MED101 - XX XX A 01 - X

No. of Pins per Row
01~50

Contact Plating

01=Tin
02=Gold Flash
Duplex plating
05=Gold Flash /Tin
Options
P=cup
T=tape reel
PT=cup+tape reel



深圳市硕康达科技有限公司
ShenZhenShi Sokcomm Technology Co., Ltd

GENERAL TOLERANCE

DESIGN: 张荣

DATE: 2007.11.07

DWG. NO.

MED101-A01

TITLE.

1.27 PIN HEADER

SINGLE ROW DIP TYPE

REV. 01

UNIT.

mm

SCALE.

5:1

PAGE.

1/1



X* ± 5.0° X. ± 0.30

CHECKED:

DATE:

PART NO.

MED101-XX XX A01-X

AUDITED:

DATE:

APPROVED:

DATE:

BASE 1.50H