

Specifications



Current Rating: 1Amp
Insulation Resistance: 1000M Ω Min.
Dielectric Withstanding: 300V AC
Contact Resistance: 20m Ω Max.
Operating Temperature: -40°C to +105°C

Materials

Contact Material: Brass

Insulation Material: Polyester, UL 94V-0
NYLON-6T

All materials must be GP materials

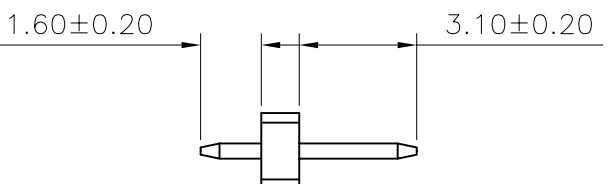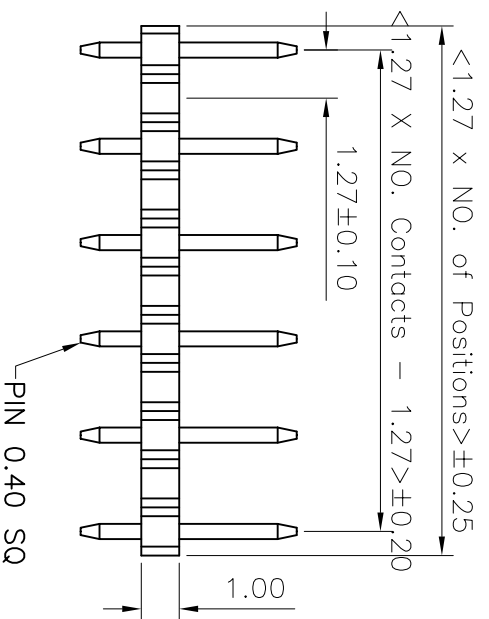

Ordering Information

MED101 - XX XX A 02 - X

No. of Pins per Row
01~50

Contact Plating

01= Tin	T=cap
02=Gold Flash	T=tape reel
Duplex plating	PT=cap+tape
05=Gold Flash	reel
...	

Options
D-1000

$P = \text{cap}$

T=tape reel

$$PT = cap + tape_{reel}$$

REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2008.05.14	张荣

Sokcconn International Standard Material 深圳市硕康达科技有限公司 ShenzhenShi Sokcconn Technology Co., Ltd								
REV. 01	UNIT. mm	SCALE. 5:1	PAGE. 1/1					
GENERAL TOLERANCE					DESIGN: 张 荣	DATE: 2008.05.14	DWG. NO. MED101-A02	TITLE. 1.27 PIN HEADER SINGLE ROW DIP TYPE BASE 1.00H
X.* ± 5.0°					X. ± 0.30	CHECKED:		
X.* ± 3.0°					X. ± 0.25	DATE:		
XX* ± 2.0°					XX ± 0.15	AUDITED:	PART NO.	
XX* ± 1.0°					XXX ± 0.10	DATE:	MED101-XX XX A02-X	
APPROVED:								