



REV.	LOOPS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2007.11.07	张荣



Recommended P.C.Board
Hole Layout
(Tolerance:±0.05)





Specifications
Current Rating: 1Amp
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding: 300V AC
Contact Resistance: 20mΩ Max.
Operating Temperature:−40°C to +105°C

Materials

Contact Material: Brass

Insulation Material: Polyester,UL 94V-0
NYLON-6T

All materials must be GP materials

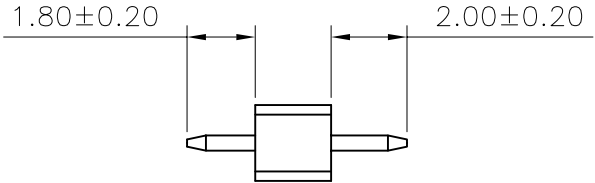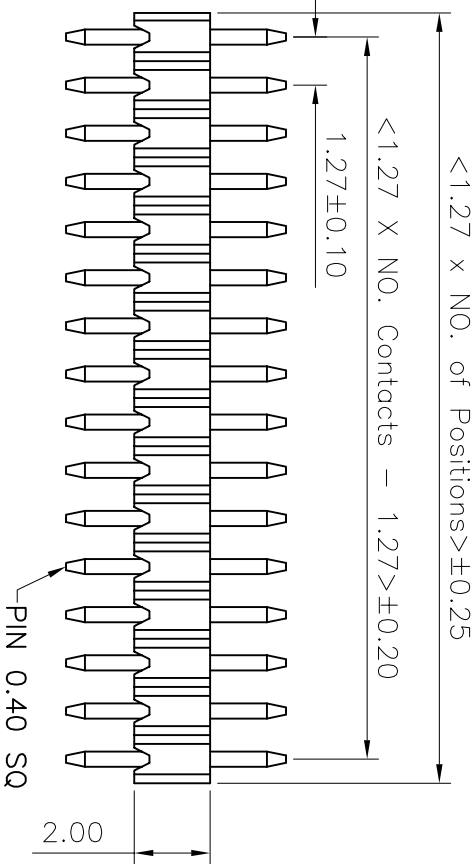

Ordering Information

MED102 - XX XX A 01 - X

No. of Pins per Row
01~50



Contact Plating
01=Tin
02=Gold Flash
Duplex plating
05=Gold Flash /Tin



深圳市硕康达科技有限公司
ShenZhenShi Sokcorn Technology Co., Ltd

GENERAL TOLERANCE

X. ± 5.0°	X. ± 0.30
.X ± 3.0°	.X ± 0.25
.XX ± 2.0°	.XX ± 0.15
.XXX ± 1.0°	.XXX ± 0.10

DESIGN: 张荣
DATE: 2007.11.07

DWG. NO. MED102-A01

TITLE.

1.27 PIN HEADER

SINGLE ROW DIP TYPE

BASE 2.00H

X. ± 5.0°	X. ± 0.30
.X ± 3.0°	.X ± 0.25
.XX ± 2.0°	.XX ± 0.15
.XXX ± 1.0°	.XXX ± 0.10

CHECKED:

DATE:

PART NO.

TITLE.

1.27 PIN HEADER

BASE 2.00H

X. ± 5.0°	X. ± 0.30
.X ± 3.0°	.X ± 0.25
.XX ± 2.0°	.XX ± 0.15
.XXX ± 1.0°	.XXX ± 0.10

CHECKED:

DATE:

PART NO.

TITLE.

1.27 PIN HEADER

BASE 2.00H

X. ± 5.0°	X. ± 0.30
.X ± 3.0°	.X ± 0.25
.XX ± 2.0°	.XX ± 0.15
.XXX ± 1.0°	.XXX ± 0.10

CHECKED:

DATE:

PART NO.

TITLE.

1.27 PIN HEADER

BASE 2.00H

X. ± 5.0°	X. ± 0.30
.X ± 3.0°	.X ± 0.25
.XX ± 2.0°	.XX ± 0.15
.XXX ± 1.0°	.XXX ± 0.10

CHECKED:

DATE:

PART NO.

TITLE.

1.27 PIN HEADER

BASE 2.00H

X. ± 5.0°	X. ± 0.30
.X ± 3.0°	.X ± 0.25
.XX ± 2.0°	.XX ± 0.15
.XXX ± 1.0°	.XXX ± 0.10

CHECKED:

DATE:

PART NO.

TITLE.

1.27 PIN HEADER

BASE 2.00H

X. ± 5.0°	X. ± 0.30
.X ± 3.0°	.X ± 0.25
.XX ± 2.0°	.XX ± 0.15
.XXX ± 1.0°	.XXX ± 0.10

CHECKED:

DATE:

PART NO.

TITLE.

1.27 PIN HEADER

BASE 2.00H

X. ± 5.0°	X. ± 0.30
.X ± 3.0°	.X ± 0.25
.XX ± 2.0°	.XX ± 0.15
.XXX ± 1.0°	.XXX ± 0.10

CHECKED:

DATE:

PART NO.

TITLE.

1.27 PIN HEADER

BASE 2.00H

X. ± 5.0°	X. ± 0.30
.X ± 3.0°	.X ± 0.25
.XX ± 2.0°	.XX ± 0.15
.XXX ± 1.0°	.XXX ± 0.10

CHECKED:

DATE:

PART NO.

TITLE.

1.27 PIN HEADER

BASE 2.00H

X. ± 5.0°	X. ± 0.30
.X ± 3.0°	.X ± 0.25
.XX ± 2.0°	.XX ± 0.15
.XXX ± 1.0°	.XXX ± 0.10

CHECKED:

DATE:

PART NO.

TITLE.

1.27 PIN HEADER

BASE 2.00H

X. ± 5.0°	X. ± 0.30
.X ± 3.0°	.X ± 0.25
.XX ± 2.0°	.XX ± 0.15
.XXX ± 1.0°	.XXX ± 0.10

CHECKED:

DATE:

PART NO.

TITLE.

1.27 PIN HEADER

BASE 2.00H

X. ± 5.0°	X. ± 0.30
.X ± 3.0°	.X ± 0.25
.XX ± 2.0°	.XX ± 0.15
.XXX ± 1.0°	.XXX ± 0.10

CHECKED:

DATE:

PART NO.

TITLE.

1.27 PIN HEADER

BASE 2.00H

X. ± 5.0°	X. ± 0.30
.X ± 3.0°	.X ± 0.25
.XX ± 2.0°	.XX ± 0.15
.XXX ± 1.0°	.XXX ± 0.10

CHECKED:

DATE:

PART NO.

TITLE.

1.27 PIN HEADER

BASE 2.00H

X. ± 5.0°	X. ± 0.30
.X ± 3.0°	.X ± 0.25
.XX ± 2.0°	.XX ± 0.15
.XXX ± 1.0°	.XXX ± 0.10

CHECKED:

DATE:

PART NO.

TITLE.

1.27 PIN HEADER

BASE 2.00H

X. ± 5.0°	X. ± 0.30
.X ± 3.0°	.X ± 0.25
.XX ± 2.0°	.XX ± 0.15
.XXX ± 1.0°	.XXX ± 0.10

CHECKED:

DATE:

PART NO.

TITLE.

1.27 PIN HEADER

BASE 2.00H

X. ± 5.0°	X. ± 0.30
.X ± 3.0°	.X ± 0.25
.XX ± 2.0°	.XX ± 0.15
.XXX ± 1.0°	.XXX ± 0.10

CHECKED:

DATE:

PART NO.

TITLE.

1.27 PIN HEADER

BASE 2.00H

X. ± 5.0°	X. ± 0.30
.X ± 3.0°	.X ± 0.25
.XX ± 2.0°	.XX ± 0.15
.XXX ± 1.0°	.XXX ± 0.10

CHECKED:

DATE:

PART NO.

TITLE.

1.27 PIN HEADER

BASE 2.00H

X. ± 5.0°	X. ± 0.30
.X ± 3.0°	.X ± 0.25
.XX ± 2.0°	.XX ± 0.15
.XXX ± 1.0°	.XXX ± 0.10

CHECKED:

DATE:

PART NO.

TITLE.

1.27 PIN HEADER

BASE 2.00H

X. ± 5.0°	X. ± 0.30
.X ± 3.0°	.X ± 0.25
.XX ± 2.0°	.XX ± 0.15
.XXX ± 1.0°	.XXX ± 0.10

CHECKED:

DATE:

PART NO.

TITLE.

1.27 PIN HEADER

BASE 2.00H

X. ± 5.0°	X. ± 0.30
.X ± 3.0°	.X ± 0.25
.XX ± 2.0°	.XX ± 0.15
.XXX ± 1.0°	.XXX ± 0.10

CHECKED:

DATE:

PART NO.

TITLE.

1.27 PIN HEADER

BASE 2.00H

X. ± 5.0°	X. ± 0.30
.X ± 3.0°	.X ± 0.25
.XX ± 2.0°	.XX ± 0.15
.XXX ± 1.0°	.XXX ± 0.10

CHECKED:

DATE:

PART NO.

TITLE.

1.27 PIN HEADER

BASE 2.00H

X. ± 5.0°	X. ± 0.30
.X ± 3.0°	.X ± 0.25
.XX ± 2.0°	.XX ± 0.15
.XXX ± 1.0°	.XXX ± 0.10

CHECKED:

DATE:

PART NO.

TITLE.

1.27 PIN HEADER

BASE 2.00H

X. ± 5.0°	X. ± 0.30
.X ± 3.0°	.X ± 0.25
.XX ± 2.0°	.XX ± 0.15
.XXX ± 1.0°	.XXX ± 0.10

CHECKED:

DATE:

PART NO.

TITLE.

1.27 PIN HEADER

BASE 2.00H

X. ± 5.0°	X. ± 0.30
.X ± 3.0°	.X ± 0.25
.XX ± 2.0°	.XX ± 0.15
.XXX ± 1.0°	.XXX ± 0.10

CHECKED:

DATE:

PART NO.

TITLE.

1.27 PIN HEADER

BASE 2.00H

X. ± 5.0°	X. ± 0.30
.X ± 3.0°	.X ± 0.25
.XX ± 2.0°	.XX ± 0.15
.XXX ± 1.0°	.XXX ± 0.10

CHECKED:

DATE:

PART NO.

TITLE.

1.27 PIN HEADER

BASE 2.00H

X. ± 5.0°	X. ± 0.30
.X ± 3.0°	.X ± 0.25
.XX ± 2.0°	.XX ± 0.15
.XXX ± 1.0°	.XXX ± 0.10

CHECKED:

DATE:

PART NO.

TITLE.

1.27 PIN HEADER

BASE 2.00H

X. ± 5.0°	X. ± 0.30
.X ± 3.0°	.X ± 0.25
.XX ± 2.0°	.XX ± 0.15
.XXX ± 1.0°	.XXX ± 0.10

CHECKED:

DATE:

PART NO.

TITLE.

1.27 PIN HEADER

BASE 2.00H

X. ± 5.0°	X. ± 0.30
.X ± 3.0°	.X ± 0.25
.XX ± 2.0°	.XX ± 0.15
.XXX ± 1.0°	.XXX ± 0.10

CHECKED:

DATE:

PART NO.

TITLE.

1.27 PIN HEADER

BASE 2.00H

X. ± 5.0°	X. ± 0.30
.X ± 3.0°	.X ± 0.25
.XX ± 2.0°	.XX ± 0.15
.XXX ± 1.0°	.XXX ± 0.10

CHECKED:

DATE:

PART NO.

TITLE.

1.27 PIN HEADER

BASE 2.00H

X. ± 5.0°	X. ± 0.30
.X ± 3.0°	.X ± 0.25
.XX ± 2.0°	.XX ± 0.15
.XXX ± 1.0°	.XXX ± 0.10

CHECKED:

DATE:

PART NO.

TITLE.

1.27 PIN HEADER

BASE 2.00H

X. ± 5.0°	X. ± 0.30
.X ± 3.0°	.X ± 0.25
.XX ± 2.0°	.XX ± 0.15
.XXX ± 1.0°	.XXX ± 0.10

CHECKED:

DATE: