REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2012.05.17	尹 晖

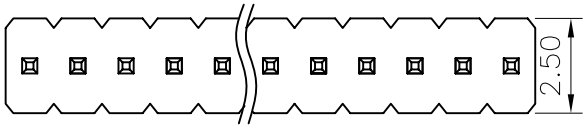



Specifications

Current Rating: 1Amp
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding: 300V AC
Contact Resistance: 20mΩ Max.
Operating Temperature:−40°C to +105°C

Materials

Contact Material: Brass
Insulation Material: Polyester, UL 94V−0
NYLON−6T
All materials must be GP materials

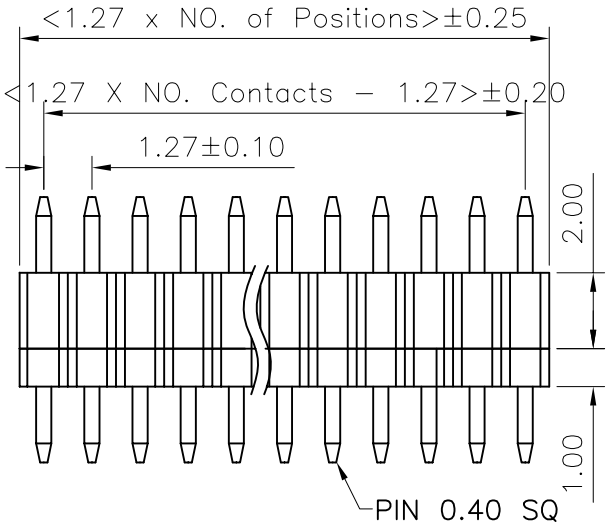

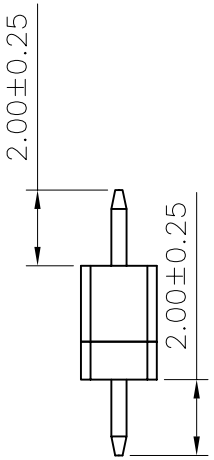

Recommended P.C.Board

Hole Layout

(Tolerance:±0.05)



Ordering Information

MED103 − XX XX A 01

No. of Pins per Row
01~50

Contact Plating
01=Tin
02=Gold Flash
Duplex plating
05=Gold Flash /Tin
…

深圳市硕康达科技有限公司 ShenZhenShi Sokconn Technology Co.,Ltd	GENERAL TOLERANCE		DESIGN: 尹 晖	DATE: 2012.05.17	DWG. NO. MED103−A01	TITLE. 1.27 PIN HEADER SINGLE ROW DIP TYPE BASE 3.00H
	X.° ± 5.0°	X. ± 0.30	CHECKED:	DATE:		
	.X° ± 3.0°	.X ± 0.25	AUDITED:	DATE:	PART NO. MED103−XX XX A01	
	.XX° ± 2.0°	.XX ± 0.15	APPROVED:	DATE:		
	.XXX° ± 1.0°	.XXX ± 0.10				
REV. 01 / UNIT. mm / SCALE. 1:1 / PAGE. 1/1						