

REV.	LOOPS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2007.11.07	张荣


Recommended P.C.Board

Specifications

Current Rating: 1Amp
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding: 300V AC
Contact Resistance: 20mΩ Max.
Operating Temperature: -40°C to +105°C

Hole Layout

(Tolerance: ±0.05)





Materials

Contact Material: Brass

Insulation Material: Polyester, UL 94V-0

NYLON-6T

All materials must be GP materials

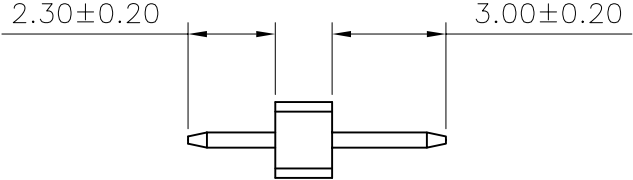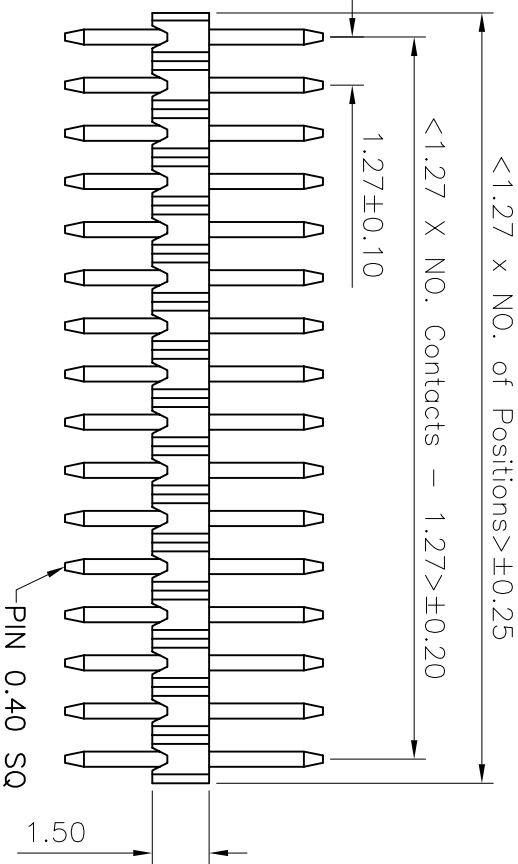

Ordering Information

MED105 - XX XX A 01 - X

No. of Pins per Row
01~50

Contact Plating

01=Tin
02=Gold Flash
Duplex plating
05=Gold Flash /Tin
Options
P=cap
T=tape reel
PT=cap+tape reel



深圳市硕康达科技有限公司
ShenZhenShi Sokcom Technology Co., Ltd

GENERAL TOLERANCE

DESIGN: 张荣

DATE: 2007.11.07

DWG. NO.

MED105-A01

TITLE.

1.27 PIN HEADER

SINGLE ROW DIP TYPE

REV.

01

UNIT.
mm

SCALE.
5:1

PAGE.
1/1



X* ± 5.0°
X* ± 3.0°
.XX* ± 2.0°
.XXX* ± 1.0°

X. ± 0.30
X. ± 0.25
.XX ± 0.15
.XXX ± 0.10

CHECKED:

DATE:

AUDITED:

DATE:

APPROVED:

DATE:

PART NO.

MED105-XX XX A01-X