REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2012.07.10	尹 晖

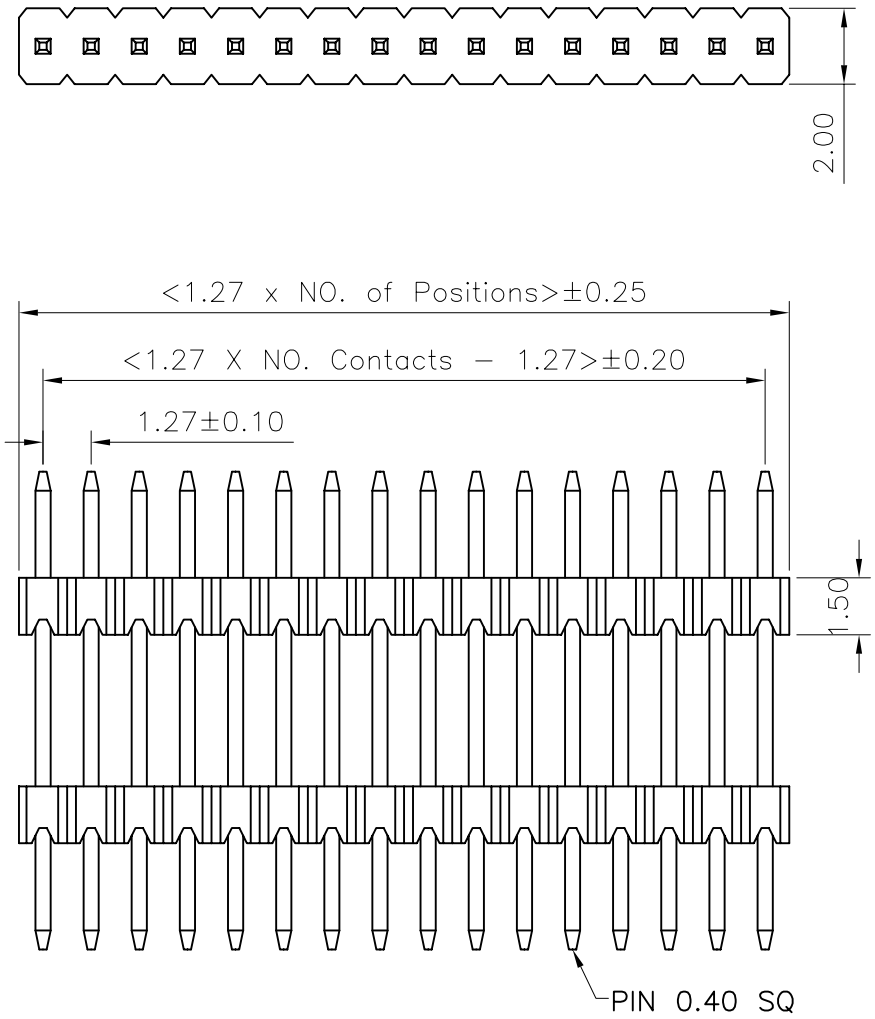

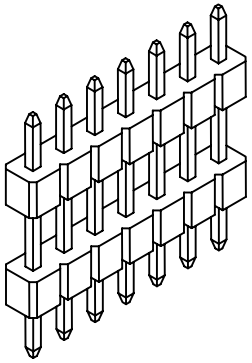

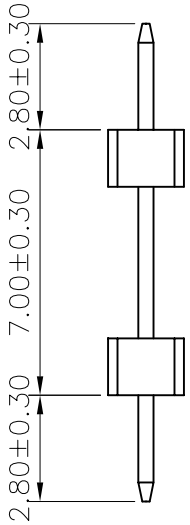

Specifications

Current Rating: 1Amp
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding: 300V AC
Contact Resistance: 20mΩ Max.
Operating Temperature:−40°C to +105°C

Materials

Contact Material: Brass
Insulation Material: Polyester, UL 94V−0
NYLON−6T
All materials must be GP materials

Recommended P.C.Board

Hole Layout

(Tolerance:±0.05)



Ordering Information

MED125 − XX XX A 01

No. of Pins per Row
01~50

Contact Plating
01=Tin
02=Gold Flash
Duplex plating
05=Gold Flash /Tin
…

深圳市硕康达科技有限公司
ShenZhenShi Sokconn Technology Co., Ltd

GENERAL TOLERANCE	
X.° ± 5.0°	X. ± 0.30
.X° ± 3.0°	.X ± 0.25
.XX° ± 2.0°	.XX ± 0.15
.XXX° ± 1.0°	.XXX ± 0.10

REV.	UNIT.	SCALE.	PAGE.
01	mm	5:1	1/1

DESIGN: 尹 晖	DATE: 2012.07.10	DWG. NO. MED125−A01	TITLE. 1.27 PIN HEADER SINGLE ROW DIP TYPE BASE 1.50H
CHECKED:	DATE:		
AUDITED:	DATE:	PART NO. MED125−XX XX A01	
APPROVED:	DATE:		