

REV.	LOOPS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2008.09.09	宋辉

Specifications

Current Rating: 1Amp
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding: 300V AC
Contact Resistance: 20mΩ Max.
Operating Temperature: -40°C to +105°C

Materials

Contact Material: Brass


Insulation Material: Polyester, UL 94V-0
NYLON-6T

All materials must be GP materials

Recommended P.C.Board

Hole Layout

(Tolerance:±0.05)







Ordering Information

MED102 - XX XX A 01

No. of Pins per Row
01~50

Contact Plating
01=Tin
02=Gold Flash
Duplex plating
...

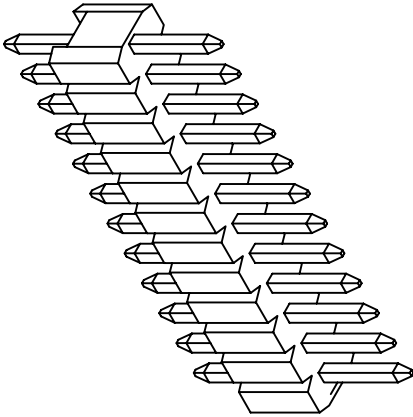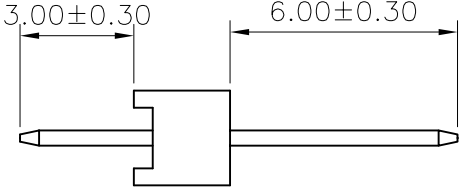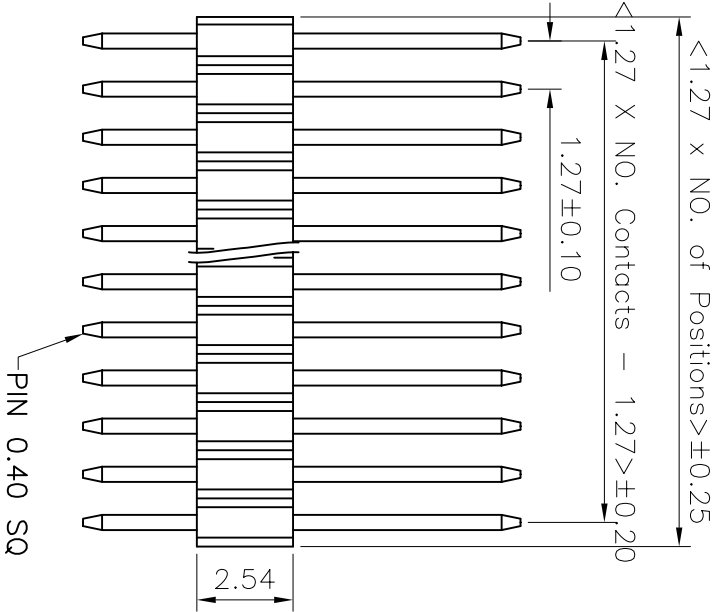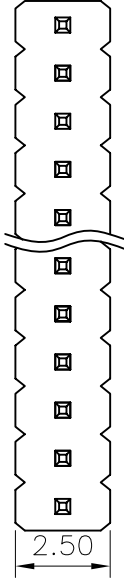

深圳市硕康达科技有限公司
ShenZhenShi Sokcom Technology Co., Ltd

GENERAL TOLERANCE

X* ± 5.0° X. ± 0.30

DESIGN: 宋辉

DWG. NO. MED154-A01

TITLE.

1.27 PIN HEADER

X* ± 3.0° X. ± 0.25

CHECKED:

PART NO.

SINGLE ROW DIP TYPE

.XX* ± 2.0° .XX ± 0.15

AUDITED:

.XXX ± 1.0° .XXX ± 0.10

MED154-XX XX A01

APPROVED:

DATE:

DATE:

DATE:

BASE 2.54H

REV. 01

UNIT. mm

SCALE. 5:1

PAGE. 1/1

DATE:

DATE:

DATE: