



REV.	LOOPS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2007.11.07	张荣

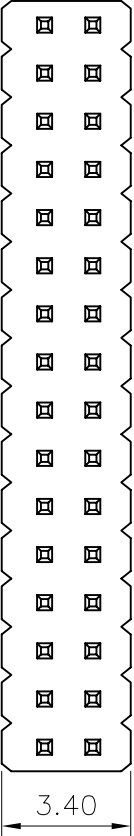

Recommended P.C.Board
Hole Layout
(Tolerance:±0.05)

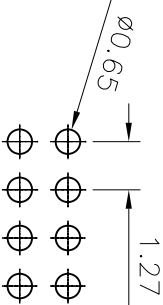



Specifications
Current Rating: 1Amp
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding: 300V AC
Contact Resistance: 20mΩ Max.
Operating Temperature:−40°C to +105°C

Materials

Contact Material: Brass

Insulation Material: Polyester,UL 94V-0
NYLON-6T

All materials must be GP materials

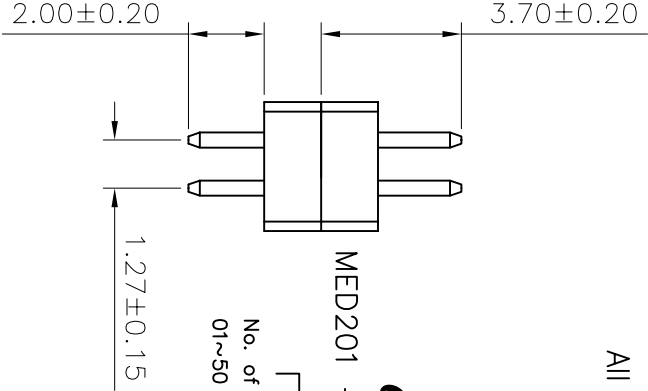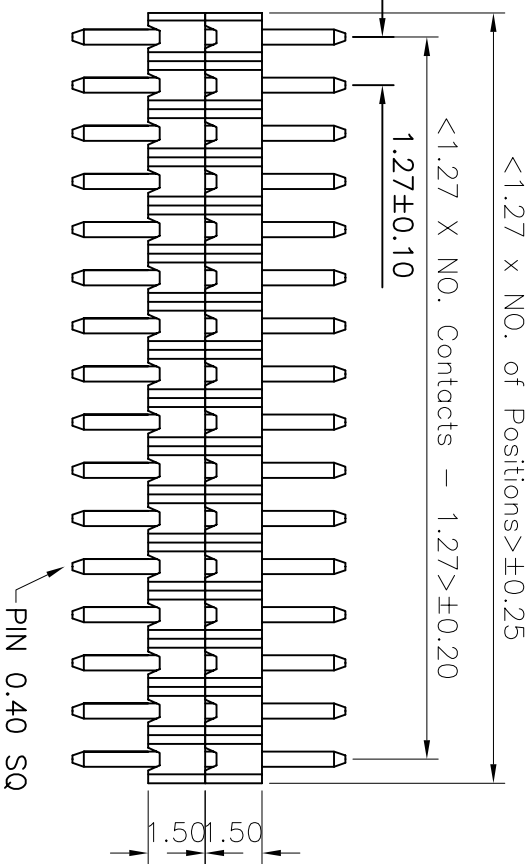

Ordering Information

MED201 - XX XX A 01 - X
No. of Pins per Row
01~50
Contact Plating
01=Tin
02=Gold Flash
Duplex plating
05=Gold Flash /Tin
Options
P=cap
T=tape reel
PT=cdp +tape
reel



深圳市硕康达科技有限公司
ShenzhenShi Sokcom Technology Co., Ltd

GENERAL TOLERANCE

DESIGN: 张荣

DATE: 2007.11.07

DWG. NO.

MED201-A01

TITLE.

1.27 PIN HEADER

X. ± 5.0° X. ± 0.30

CHECKED:

DATE:

PART NO.

.XX ± 3.0° .X ± 0.25

AUDITED:

DATE:

MED201-XX XX A01-X

REV.

01

UNIT.

mm

SCALE.

5:1

PAGE.

1/1



.XX ± 2.0° .XX ± 0.15

APPROVED:

DATE:

MED201-XX XX A01-X

DUAL ROWS DIP TYPE
BASE 3.00H