


REV.	LOOPS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2007.08.02	张荣

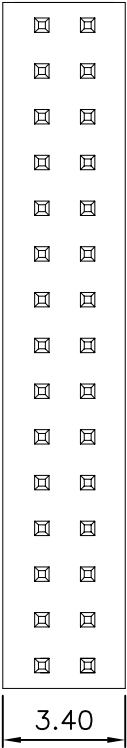

Specifications

Current Rating: 1Amp

Insulation Resistance: 1000MΩ Min.

Dielectric Withstanding: 300V AC

Contact Resistance: 20mΩ Max.

Operating Temperature: -40℃ to +105℃



Materials

Contact Material: Brass


Insulation Material: Polyester, UL 94V-0

NYLON-6T


All materials must be GP materials

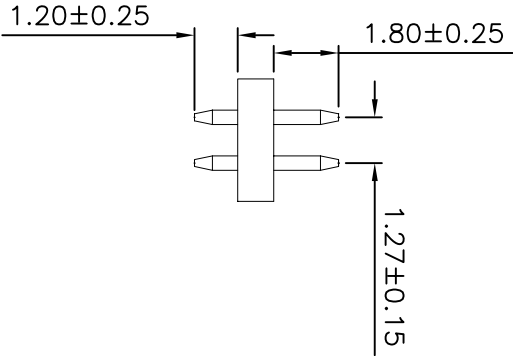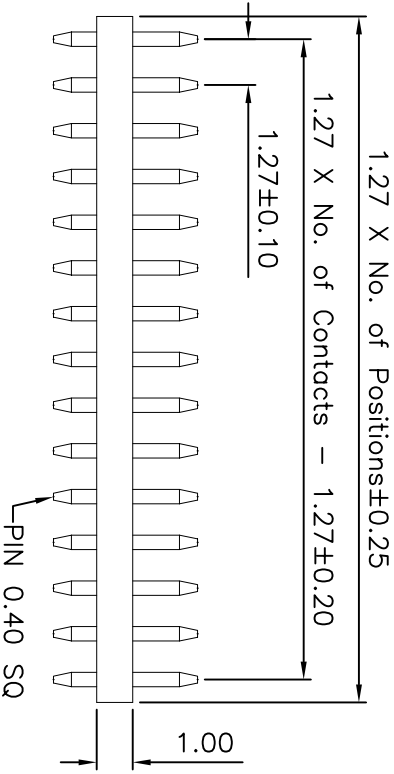

RECOMMENDED P.C.B LAYOUT



Ordering Information

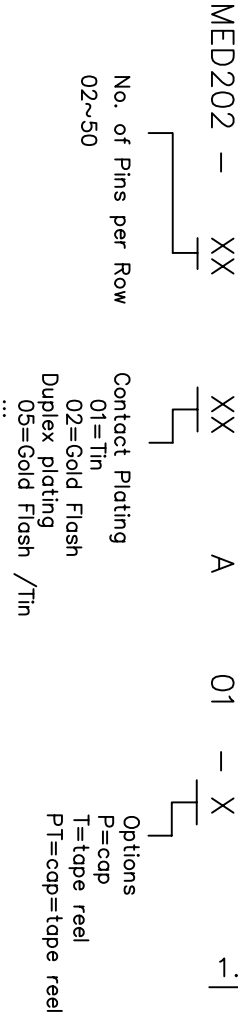

深圳市硕康达科技有限公司
ShenzhenShi Sokcorn Technology Co., Ltd

REV.	UNIT.	SCALE.	PAGE.
01	mm	5:1	1/1

GENERAL TOLERANCE			
X* ± 5.0°	X.	± 0.30	
X* ± 3.0°	X	± 0.25	
.XX* ± 2.0°	.XX	± 0.15	
.XXX* ± 1.0°	.XXX	± 0.10	

DESIGN:	张荣	DATE:	2007.08.02
CHECKED:		DATE:	
AUDITED:		DATE:	
APPROVED:		DATE:	

DWG. NO.	PART NO.
MED202-A01	MED202-XX XX A01-X

TITLE.
1.27 PIN HEADER DUAL ROWS DIP TYPE BASE 1.00