

| REV. | LOOPS. | DESCRIPTION      | DATE       | DRAWN |
|------|--------|------------------|------------|-------|
| 01   |        | INITIAL RELEASE. | 2011.12.01 | 尹 晖   |

### Specifications


Current Rating: 1Amp  
Insulation Resistance: 1000MΩ Min.  
Dielectric Withstanding: 300V AC  
Contact Resistance: 20mΩ Max.  
Operating Temperature: -40°C to +105°C

### Materials

Contact Material: Brass/Gold 1u"  
Insulation Material: Polyester, UL 94V-0  
NYLON-6T

All materials must be GP materials

Recommended P.C.Board  
Hole Layout  
(Tolerance:±0.05)




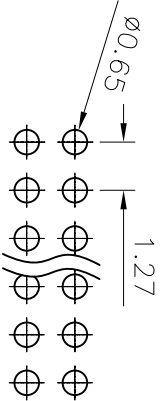


### Ordering Information

MED205 - XX XX A 01

No. of Pins per Row  
01~50

Contact Plating  
01=TiN  
02=Gold Flash  
Duplex plating  
05=Gold 5u"  
10=Gold 10u"  
30=Gold 30u"  
...

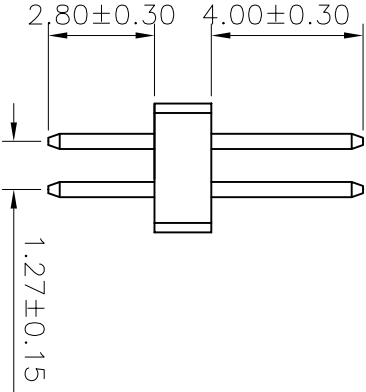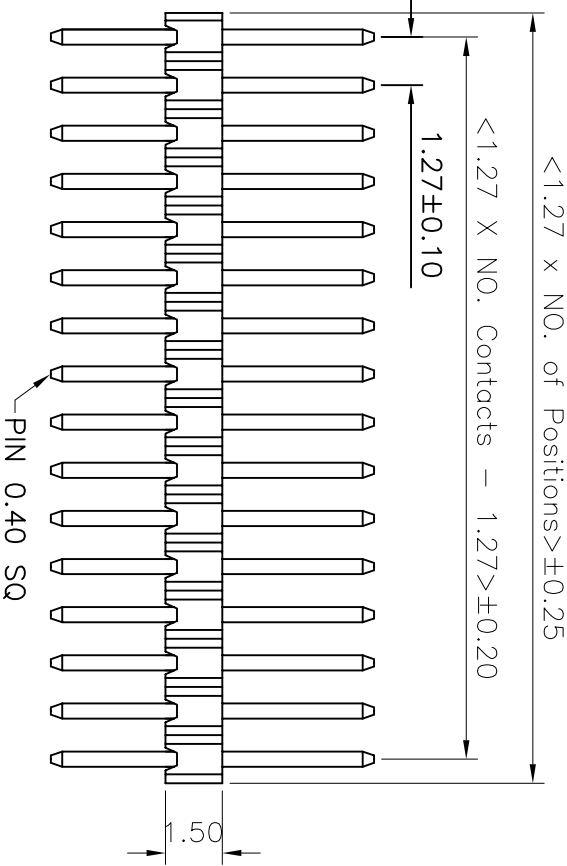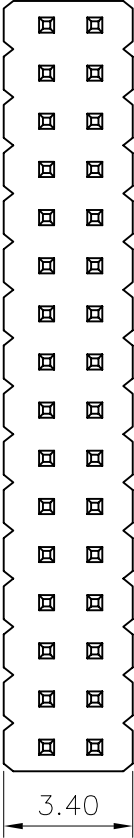

深圳市硕康达科技有限公司  
ShenZhenShi Sokoon Technology Co., Ltd

### GENERAL TOLERANCE

DESIGN: 尹 晖

DATE: 2011.12.01

DWG. NO.

MED205-A01

TITLE.

1.27 PIN HEADER

X. ± 5.0" X. ± 0.30  
X. ± 3.0" X. ± 0.25  
XX ± 2.0" XX ± 0.15  
XXX ± 1.0" XXX ± 0.10

CHECKED:

DATE:

PART NO.

DUAL ROWS DIP TYPE

REV.

01

UNIT.

mm

SCALE.

5:1

PAGE.

1/1



.XXX ± 1.0"

.XXX ± 0.10

APPROVED:

DATE:

MED205-XX XX A01

BASE 1.50H