

Cen-Link 专用/管 装

REV.	LOOPS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2011.05.18	宋辉

Specifications

Current Rating: 1Amp
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding: 300V AC
Contact Resistance: 20mΩ Max.
Operating Temperature: -40°C to +105°C


Materials

Contact Material: Brass/Gold 1u"

Insulation Material: Polyester, UL 94V-0
NYLON-6T

All materials must be GP materials

Recommended P.C.Board
Hole Layout
(Tolerance:±0.05)

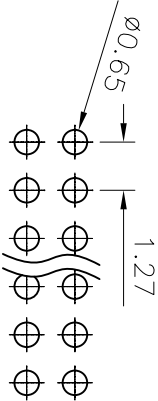


Ordering Information

MED225 - XX XX A 01

No. of Pins per Row
01~50

Contact Plating
01=Tin
02=Gold Flash
Duplex plating,
05=Gold 5u"
10=Gold 10u"
30=Gold 30u"
...

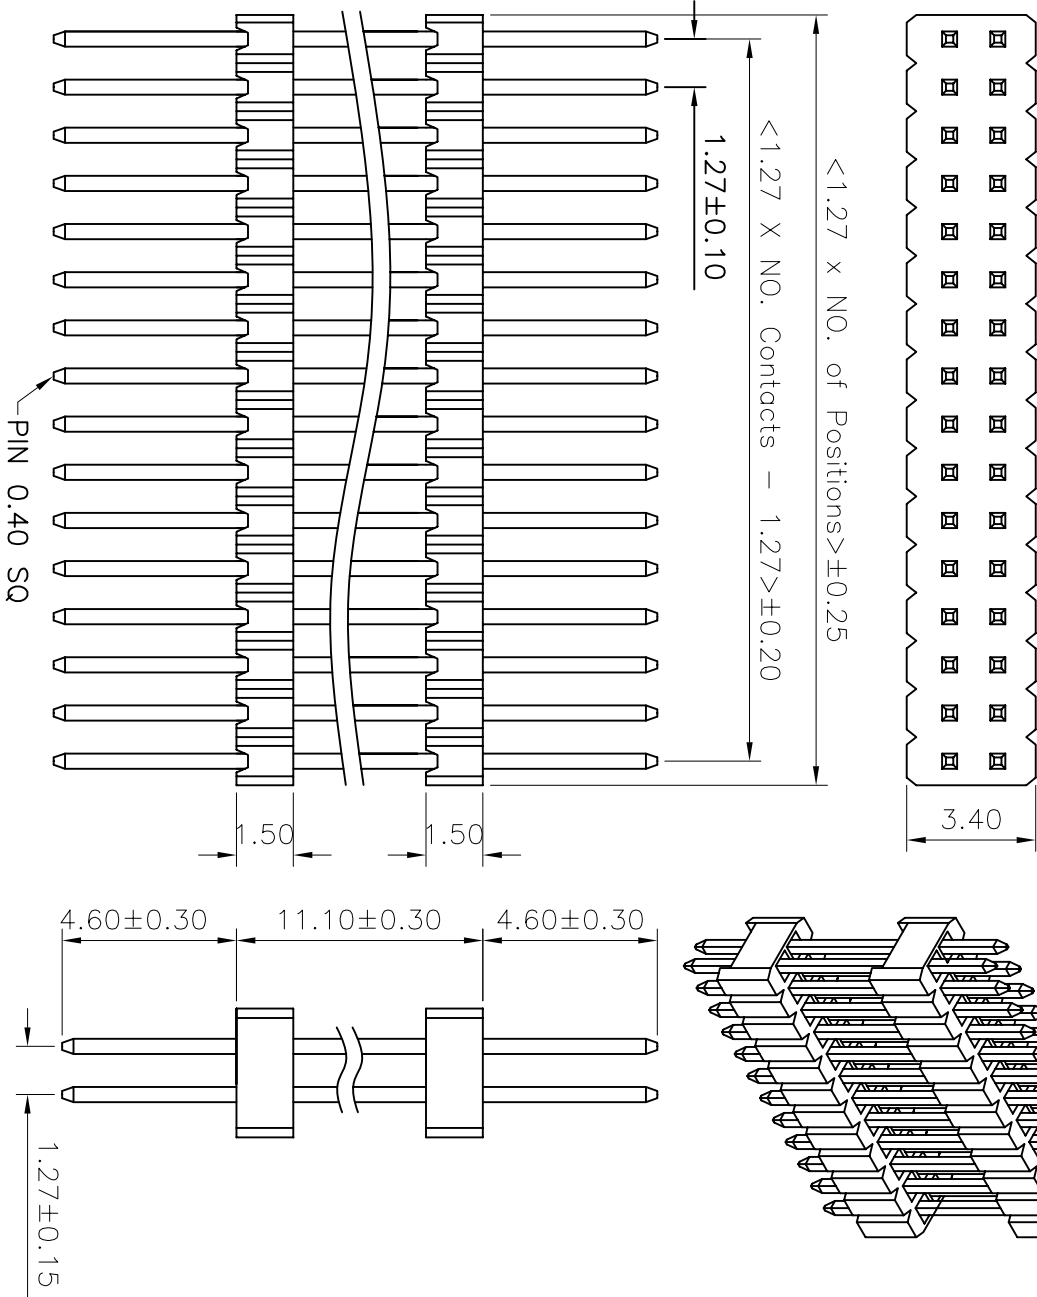

深圳市硕康达科技有限公司
ShenZhenShi Sokocomm Technology Co., Ltd

GENERAL TOLERANCE

DESIGN: 宋辉

DATE: 2011.05.18

DWG. NO.

MED225-A01

TITLE.

1.27 PIN HEADER

DUAL ROWS DIP TYPE

REV.

01

UNIT.

mm

SCALE.

5:1

PAGE.

1/1



X* ± 5.0"	X.	± 0.30
X* ± 3.0"	X	± 0.25
XX* ± 2.0"	XX	± 0.15
.XXX ± 1.0"	.XXX	± 0.10

CHECKED:

AUDITED:

APPROVED:

PART NO.

MED225-XX XX A01

BASE 1.50H