



REV.	LOOPS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2008.05.16	张荣

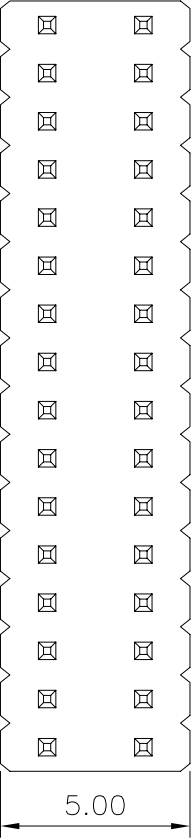


Recommended P.C.Board
Hole Layout
(Tolerance:±0.05)



Specifications
Current Rating: 1Amp
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding: 300V AC
Contact Resistance: 20mΩ Max.
Operating Temperature: -40°C to +105°C

Materials

Contact Material: Brass
Insulation Material: Polyester, UL 94V-0
NYLON-6T
All materials must be GP materials

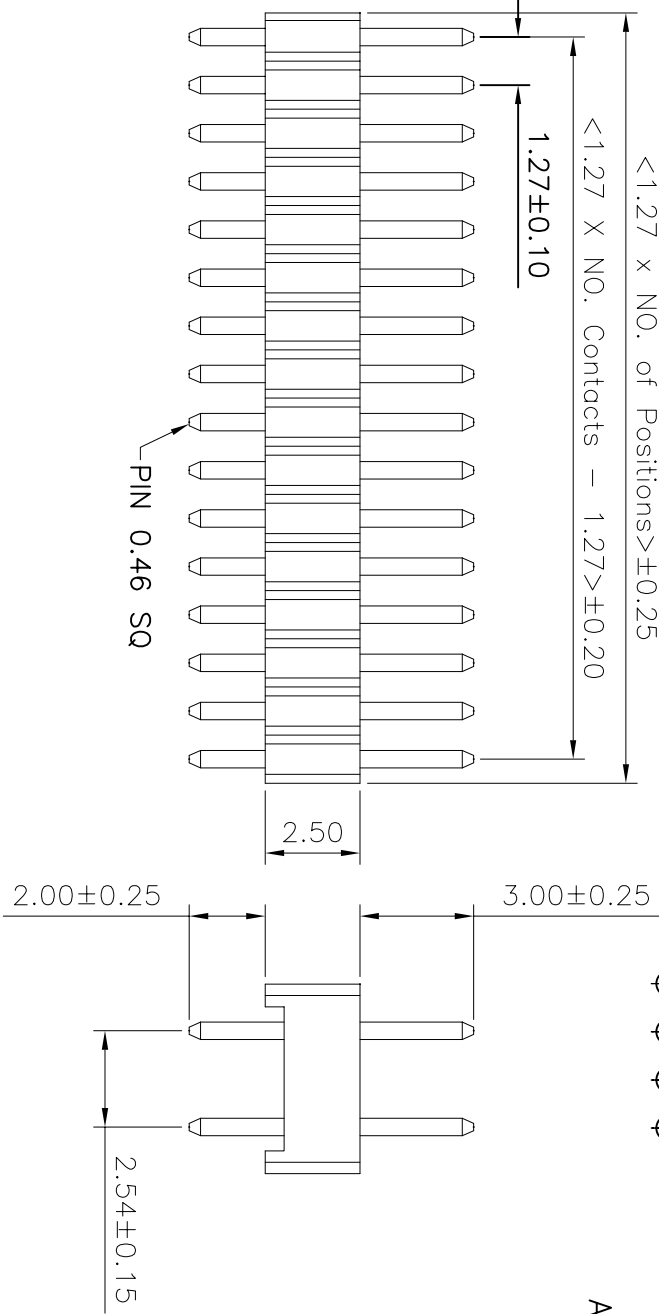

Ordering Information

MED201 - XX XX A 01

No. of Pins per Row
01~50

Contact Plating
01=Tin
02=Gold Flash
Duplex plating
05=Gold Flash /Tin
...



深圳市硕康达科技有限公司
ShenzhenShi Sokcom Technology Co., Ltd

GENERAL TOLERANCE

DESIGN: 张荣

DATE: 2008.05.16

DWG. NO.

MED254-A01

TITLE.

1.27 PIN HEADER

REV.

01

UNIT.

mm

SCALE.

5:1

PAGE.

1/1



X. ± 5.0° X. ± 0.30

X. ± 3.0° X. ± 0.25

.XX ± 2.0° .XX ± 0.15

.XXX ± 1.0° .XXX ± 0.10

CHECKED:

AUDITED:

APPROVED:

DATE:

DATE:

DATE:

PART NO.

MED254-XX XX A01

DUAL ROWS DIP TYPE

BASE 2.50H