


REV.	LOOPS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2009.09.04	张荣

Recommended P.C.Board

Hole Layout

(Tolerance:±0.05)



Specifications

Current Rating: 1Amp
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding: 300V AC
Contact Resistance: 20mΩ Max.
Operating Temperature:−40°C to +105°C




Materials

Contact Material: Brass

Insulation Material: Polyester,UL 94V−0

NYLON−6T

All materials must be GP materials

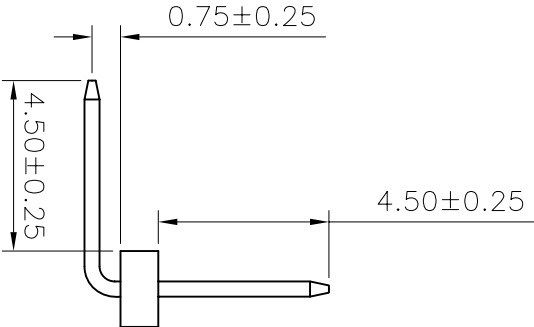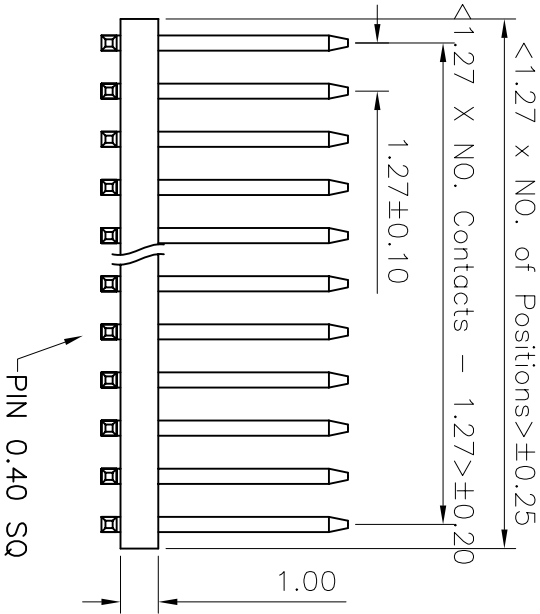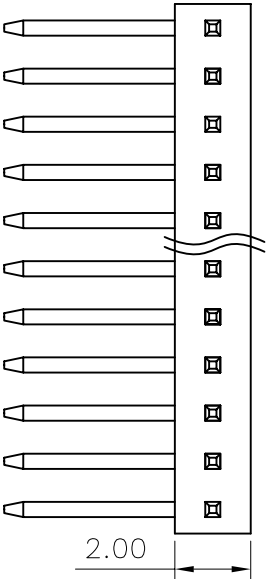

Ordering Information

MER101 − XX XX A 02

No. of Pins per Row
01~50

Contact Plating
01=Tin
02=Gold Flash
Duplex plating
05=Gold Flash /Tin
...



深圳市硕康达科技有限公司
ShenzhenShi Sokcon Technology Co., Ltd

GENERAL TOLERANCE

DESIGN: 张荣

DATE: 2009.09.04

DWG. NO.

MER101−A02

TITLE.

1.27 PIN HEADER

SINGLE ROW DIP TYPE

BASE 1.00H

X. ± 5.0°

CHECKED:

DATE:

PART NO.

MER101−XX XX A02

DATE:

DATE:

DATE:

.XX ± 3.0°

AUDITED:

DATE:

DATE:

DATE:

DATE:

DATE:

DATE:

.XXX ± 1.0°

APPROVED:

DATE:

DATE:

DATE:

DATE:

DATE:

DATE:

A

B

C

D

E

F

A

B

C

D

E

F