

REV.	LOOPS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2012.08.30	尹 晖

Specifications

Current Rating: 1Amp
Insulation Resistance: 1000M Ω Min.
Dielectric Withstanding: 300V AC
Contact Resistance: 20m Ω Max.
Operating Temperature: -40°C to +105°C

Materials

Contact Material: Brass

Insulation Material: Polyester, UL 94V-0


NYLON-6T

All materials must be GP materials

Recommended P.C.Board

Hole Layout

(Tolerance: ± 0.05)






Ordering Information

MER104 - XX XX A 01

No. of Pins per Row
01~50

Contact Plating
01=Tin
02=Gold Flash
Duplex plating
05=Gold Flash /Tin
...

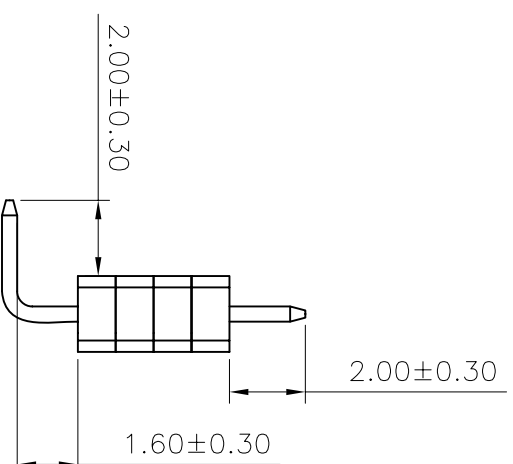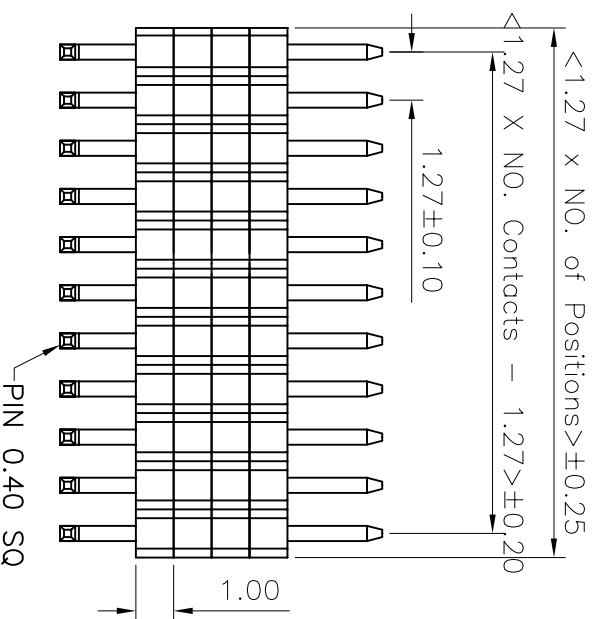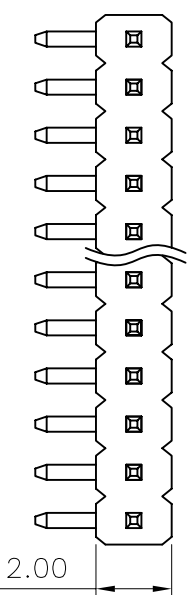

深圳市硕康达科技有限公司
ShenZhenShi Sokcom Technology Co., Ltd

GENERAL TOLERANCE

X* $\pm$ 5.0"	X. $\pm$ 0.30
X* $\pm$ 3.0"	X $\pm$ 0.25
.XX* $\pm$ 2.0"	.XX $\pm$ 0.15
.XXX* $\pm$ 1.0"	.XXX $\pm$ 0.10

DESIGN: 尹 晖

DATE: 2012.08.30

DWG. NO.

MER104-A01

TITLE.

1.27 PIN HEADER
SINGLE ROW R/A TYPE
BASE 4.00H

CHECKED:

DATE:

PART NO.

MER104-XX XX A01

DATE:

DATE:

DATE:

DATE:

DATE: