
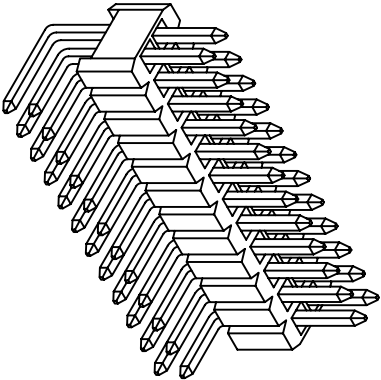


REV.	LOOPS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2007.11.07	张荣

Specifications

Current Rating: 1Amp
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding: 300V AC
Contact Resistance: 20mΩ Max.
Operating Temperature: -40°C to +105°C


Materials
Contact Material: Brass
Insulation Material: Polyester, UL 94V-0
NYLON-6T
All materials must be GP materials

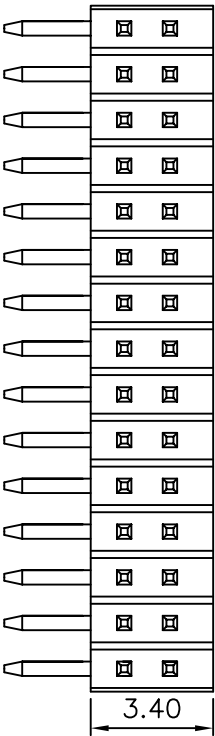

Recommended P.C.Board

Hole Layout



(Tolerance: ±0.05)

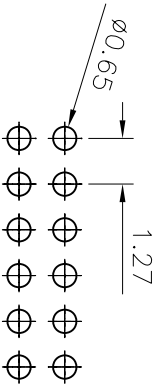

Ordering Information

MER201 - XX XX A 01

No. of Pins per Row Contact Plating
01=Tin
02=Gold Flash
Duplex plating
05=Gold Flash /Tin
...

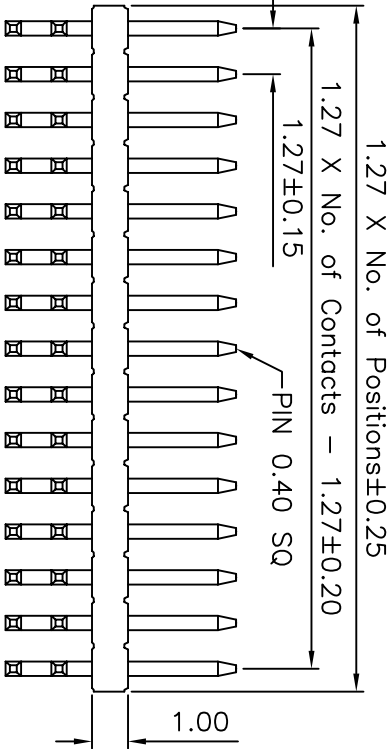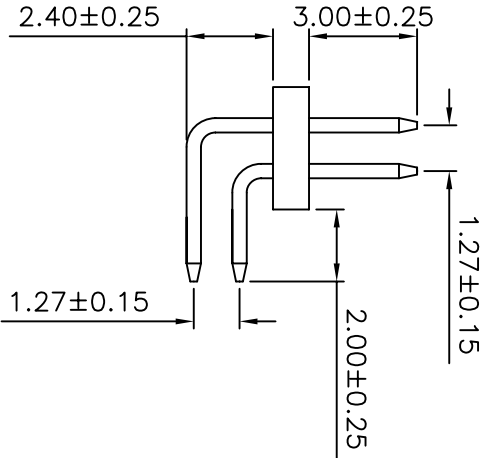

深圳市硕康达科技有限公司
ShenZhenShi Sokcorn Technology Co., Ltd

GENERAL TOLERANCE

DESIGN: 张荣

DATE: 2007.11.07

DWG. NO.

MER201-A01

TITLE.

1.27 PIN HEADER

DUAL ROWS R/A TYPE

BASE 1.00H

REV.	UNIT.	SCALE.	PAGE.
01	mm	5:1	1/1

X. ± 5.0"	X. ± 0.30
X. ± 3.0"	X. ± 0.25
.XX ± 2.0"	.XX ± 0.15
.XXX ± 1.0"	.XXX ± 0.10

CHECKED:

AUDITED:

DATE:

DATE:

DATE:

PART NO.

MER201-XX XX A01-X