



REV.	LOOPS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2007.10.27	张荣

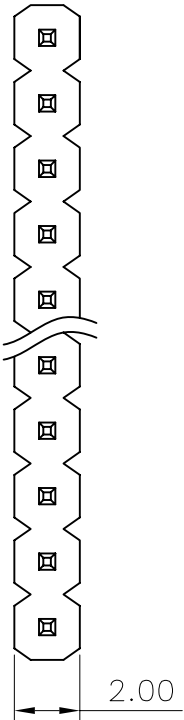

Specifications
Current Rating: 2Amp
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding: 500V AC
Contact Resistance: 20mΩ Max.
Operating Temperature: -40°C to +105°C


Materials

Contact Material: Brass

Insulation Material: Polyester, UL 94V-0 PBT

All materials must be ROHS materials

Recommended P.C.Board Hole Layout

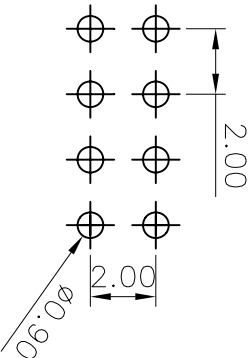

Ordering Information

MFD101 - XX XX A 01

No. of Pins per Row Contact Plating
01=Tin
02=Gold Flash
Duplex plating
05=Gold Flash /Tin
...

 深圳市硕康达科技有限公司 ShenZhenShi Sokcon Technology Co., Ltd				GENERAL TOLERANCE				DESIGN: 张荣		DATE: 2007.10.26		DWG. NO. MFD101-A01		TITLE. 2.00 PIN HEADER	
				X. ± 5.0°				CHECKED:		DATE:		PART NO.		DUAL ROWS DIP TYPE	
				.X ± 3.0°				AUDITED:		DATE:		MFD101-XX XX A01		BASE 2.00H	
REV. 01				.XX ± 2.0°				APPROVED:		DATE:					
UNIT. mm				SCALE. 5:1				PAGE. 1/1							

