



REV.	LOOPS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2007.10.27	张荣

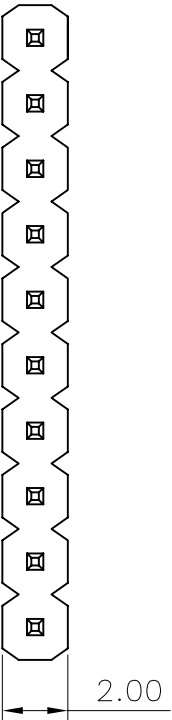



Recommended P.C.Board
Hole Layout



Specifications
Current Rating: 2Amp
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding: 500V AC
Contact Resistance: 20mΩ Max.
Operating Temperature: -40°C to +105°C

Materials

Contact Material: Brass
Insulation Material: Polyester, UL 94V-0 PBT
All materials must be GP materials

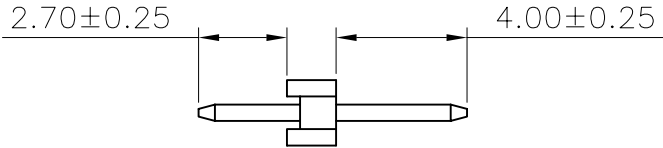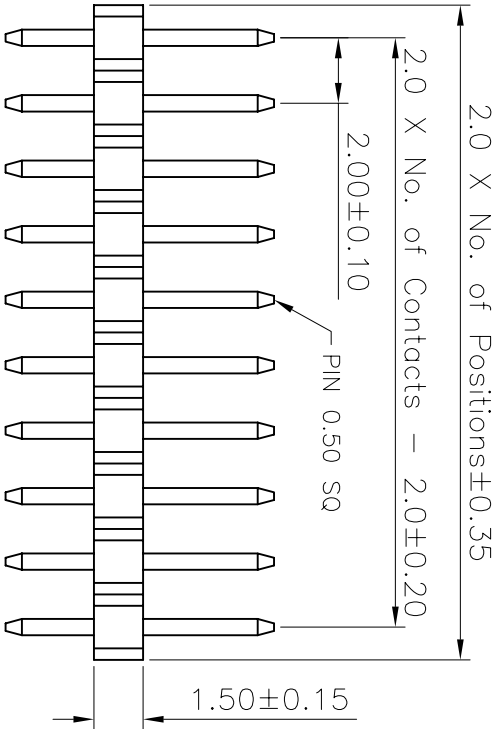

Ordering Information

MFD105 - XX XX A 01
No. of Pins per Row Contact Plating
01~40
01=Tin
02=Gold Flash
Duplex plating
05=Gold Flash /Tin
...

 深圳市硕康达科技有限公司 ShenzhenShi Sokcom Technology Co., Ltd					GENERAL TOLERANCE			DESIGN: 张 荣	DATE: 2007.10.26	DWG. NO. MFD105-A01	TITLE. 2.00 PIN HEADER DUAL ROWS DIP TYPE BASE 1.50H
					X.* ± 5.0"	X. ± 0.30	CHECKED:	DATE:			
					X.* ± 3.0"	X. ± 0.25	AUDITED:	DATE:	PART NO.		
					.XX* ± 2.0"	.XX ± 0.15	APPROVED:	DATE:	MFD105-XX XX A01		
REV. 01	UNIT. mm	SCALE. 5:1	PAGE. 1/1								