
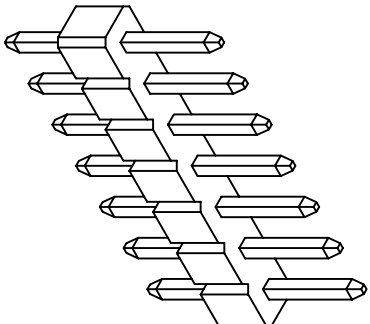


REV.	LOOPS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2007.10.27	尹 晖

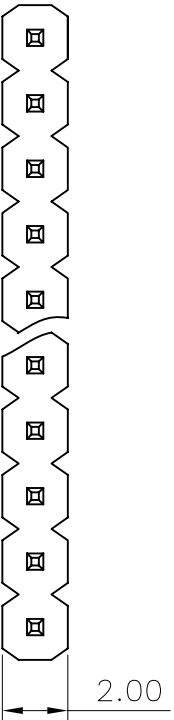

Specifications
Current Rating: 2Amp
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding: 500V AC
Contact Resistance: 20mΩ Max.
Operating Temperature: -40°C to +105°C


Materials

Contact Material: Brass

Insulation Material: Polyester, UL 94V-0
PBT/6T/9T

All materials must be GP materials

Recommended P.C.Board Hole Layout


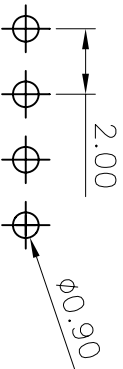


Ordering Information

MFD118 - XX XX A 01

No. of Pins per Row Contact Plating
01~40

01=Tin
02=Gold Flash
Duplex plating
05=Gold Flash /Tin
...

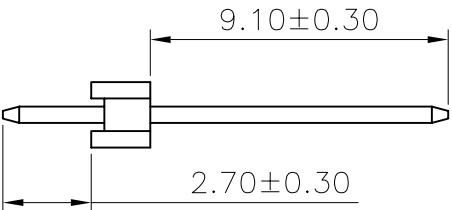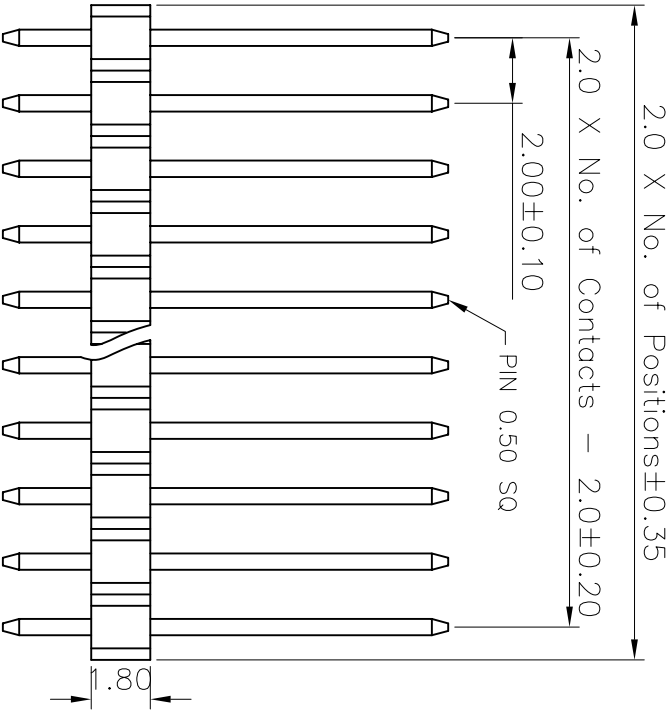

塑胶	PH2.0*H1.8 1*40PIN (私模)
----	-------------------------

方针	0.50*13.60 (四面光方针)
----	--------------------



深圳市硕康达科技有限公司
ShenzhenShi Sokcom Technology Co., Ltd

GENERAL TOLERANCE

DESIGN: 尹 晖

DATE: 2007.10.26

DWG. NO.

MFD118-A01

TITLE: 2.00 PIN HEADER

DUAL ROWS DIP TYPE

REV.	UNIT.	SCALE.	PAGE.
01	mm	1:1	1/1

X. ± 5.0"	X. ± 0.30
X. ± 3.0"	X. ± 0.25
.XX ± 2.0"	.XX ± 0.15
.XXX ± 1.0"	.XXX ± 0.10

CHECKED:	DATE:
AUDITED:	DATE:
APPROVED:	DATE:

PART NO.
MFD118-XX XX A01

BASE
2.00H