REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2011.06.07	宋 辉

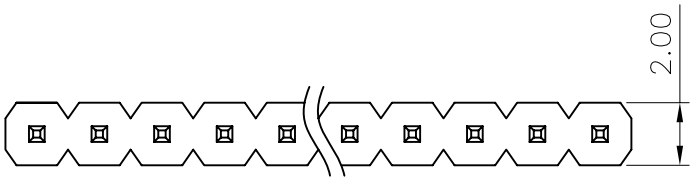

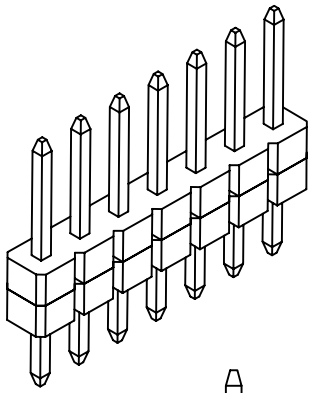



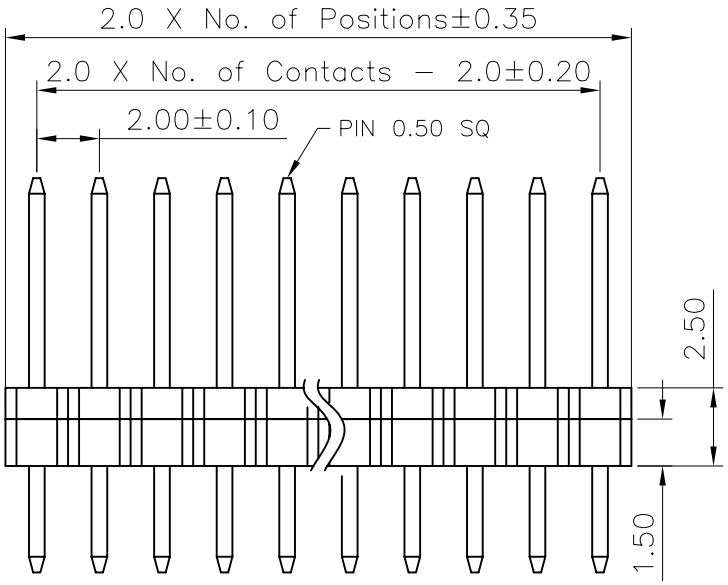

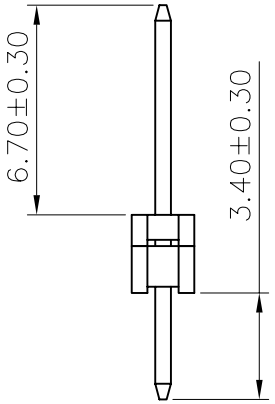

Specifications

Current Rating: 2Amp
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding: 500V AC
Contact Resistance: 20mΩ Max.

Materials

Operating Temperature:−40°C to +105°C
Contact Material: Brass
Insulation Material: Polyester, UL 94V−0
NYLON 6T
All materials must be GP materials

Recommended P.C.Board
Hole Layout

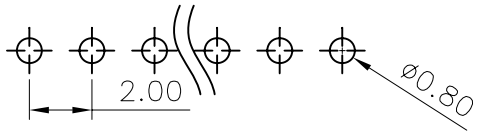

Ordering Information

MFD125 – XX XX A 01

No. of Pins per Row
01~40

Contact Plating
01=Tin
02=Gold Flash
Duplex plating
05=Gold Flash /Tin
…

深圳市硕康达科技有限公司 ShenZhenShi Sokconn Technology Co.,Ltd	GENERAL TOLERANCE		DESIGN: 尹 晖	DATE: 2011.12.22	DWG. NO. MFD125–A01	TITLE. 2.00 PIN HEADER DUAL ROWS DIP TYPE BASE 2.50H
	X.° ± 5.0°	X. ± 0.30	CHECKED:	DATE:		
	.X° ± 3.0°	.X ± 0.25	AUDITED:	DATE:	PART NO. MFD125–XX XX A01	
	.XX° ± 2.0°	.XX ± 0.15	APPROVED:	DATE:		
	.XXX° ± 1.0°	.XXX ± 0.10				
REV. 01 / UNIT. mm / SCALE. 1:1 / PAGE. 1/1						