



REV.	LOOPS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2008.04.09	张荣

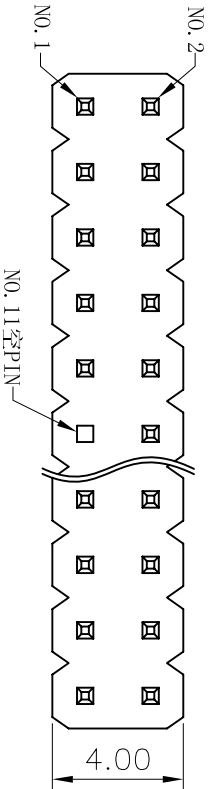



Recommended P.C.Board
Hole Layout



Specifications
Current Rating: 2Amp
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding: 500V AC
Contact Resistance: 20mΩ Max.
Operating Temperature: -40°C to +105°C

Materials

Contact Material: Brass
Insulation Material: Polyester, UL 94V-0 PBT
All materials must be GP materials

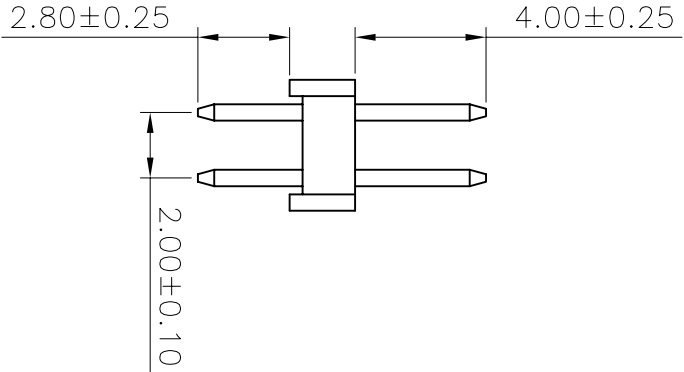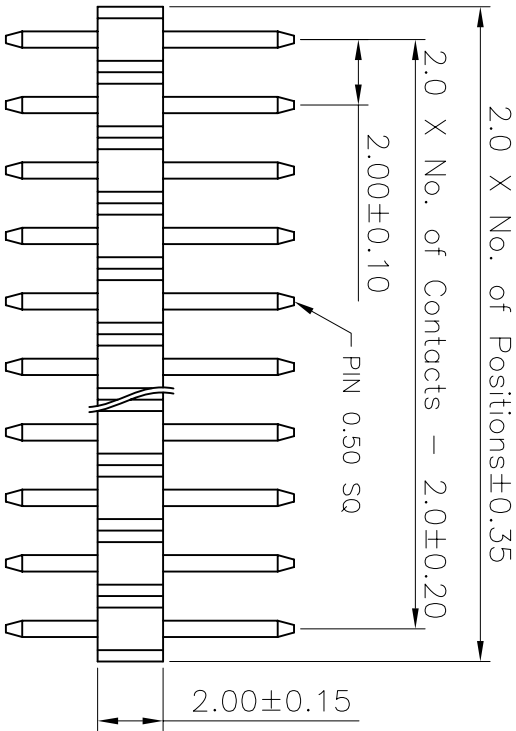

Ordering Information

MFRD201 - XX XX A 01 - 1

No. of Pins per Row Contact Plating
01~40
01=Tin
02=Gold Flash
Duplex plating
05=Gold Flash /Tin
...

 深圳市硕康达科技有限公司 ShenZhenShi Sokcom Technology Co., Ltd										GENERAL TOLERANCE				DESIGN: 张荣		DATE: 2008.04.09		DWG. NO.		TITLE.	
REV. 01UNIT. mmSCALE. 5:1PAGE. 1/1 										X. ± 5.0"		X. ± 0.30		CHECKED:		DATE:		PART NO.		2.00 PIN HEADER	
										.X* ± 3.0"		.X ± 0.25		AUDITED:		DATE:					
										.XX* ± 2.0"		.XX ± 0.15		APPROVED:		DATE:					
												.XXX ± 1.0"		.XXX ± 0.10				MFD201-XX XX A01-1		DUAL ROWS DIP TYPE	
												BASE 2.00H									