



REV.	LOOPS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2007.11.20	张荣

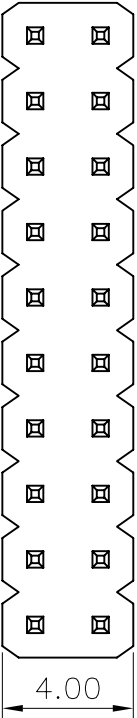



Recommended P.C.Board
Hole Layout



Specifications
Current Rating: 2Amp
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding: 500V AC
Contact Resistance: 20mΩ Max.
Operating Temperature: -40°C to +105°C

Materials

Contact Material: Brass
Insulation Material: Polyester, UL 94V-0
Nylon 6T
All materials must be GP materials

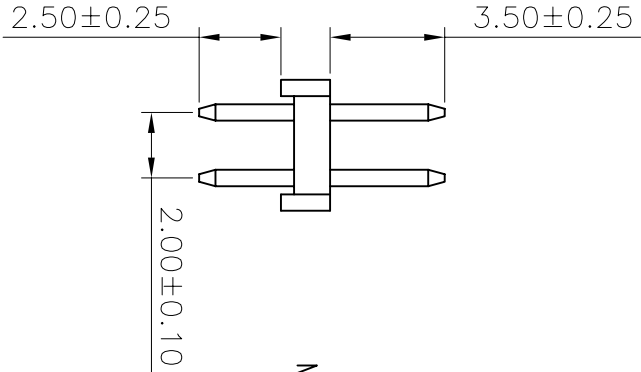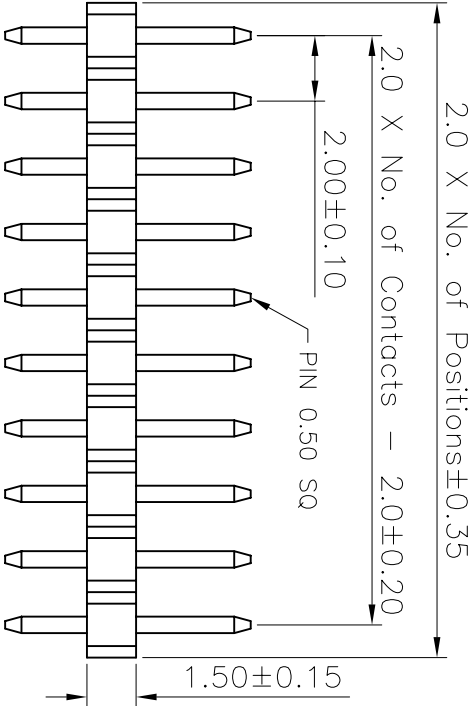

Ordering Information

MFRD203 - XX XX A 01 - X
No. of Pins per Row Contact Plating
01~40
01=Tin
02=Gold Flash
Duplex plating
05=Gold Flash /Tin
Options
P=cap
T=tape reel
PT=cap+tape reel



深圳市硕康达科技有限公司
Shenzhen Shi Sokcom Technology Co., Ltd

GENERAL TOLERANCE

DESIGN: 张荣

DATE: 2007.11.20

DWG. NO.

MFD203-A01

TITLE: 2.00 PIN HEADER

REV.

01 UNIT. mm

SCALE. 5:1

PAGE. 1/1



.XX ± 5.0° X. ± 0.30
.XX ± 3.0° X. ± 0.25
.XX ± 2.0° .XX ± 0.15
.XX ± 1.0° .XX ± 0.10

CHECKED:

DATE:

PART NO.

MFD203-XX XX A01-X

DUAL ROWS DIP TYPE
BASE 1.50H