

REV.	LOOPS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2012.12.11	尹 晖


Specifications

Current Rating: 2Amp
Insulation Resistance: 1000M Ω Min.
Dielectric Withstanding: 500V AC
Contact Resistance: 20m Ω Max.
Operating Temperature:-40°C to +105°C

Materials





Contact Material: Brass
Insulation Material: Polyester, UL 94V-0
Nylon 9T
All materials must be GP materials

Recommended P.C.Board
Hole Layout



Ordering Information

MFD B01 - XX XX A 01-1
No. of Pins per Row Contact Plating
01=Tin
02=Gold Flash
Duplex plating
05=Gold Flash /Tin
...

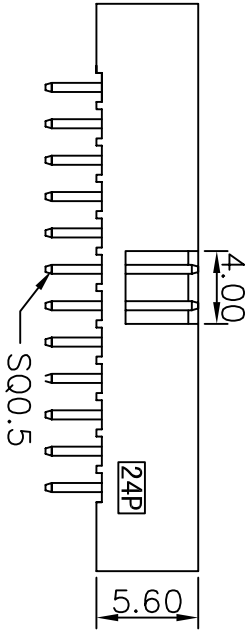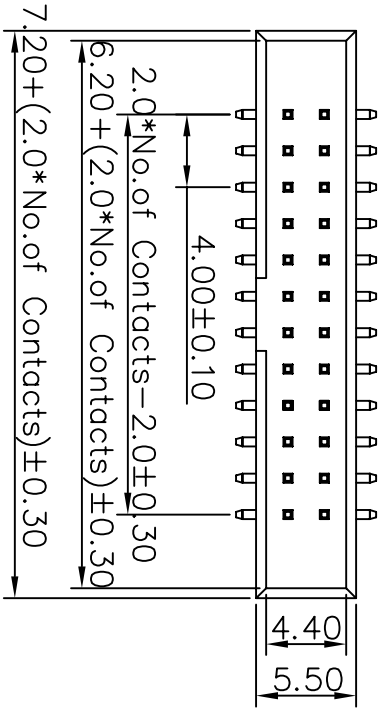

 深圳市硕康达科技有限公司 ShenZhenShi Sokconn Technology Co., Ltd				GENERAL TOLERANCE		DESIGN: 尹 晖	DWG. NO. MFD B01-A01-1	TITLE. 2.00 PIN BOX
REV. 01	UNIT. mm	SCALE. 1:1	PAGE. 1/1			CHECKED:	PART NO. MFD B01-12 XX A01-1	DUAL ROWS DIP TYPE
						AUDITED:	BASE 5.60H	
						APPROVED:		
						DATE: 2012.12.11		
						DATE:		
						DATE:		
						DATE:		
						DATE:		