

REV.	LOOPS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2013.06.17	李善桥

Specifications

Current Rating: 2Amp
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding: 500V AC
Contact Resistance: 20mΩ Max.
Operating Temperature: -40°C to +105°C

Materials





Contact Material: Brass

Insulation Material: Polyester, UL 94V-0
PBT

All materials must be ROHS materials

Recommended P.C.Board

Hole Layout

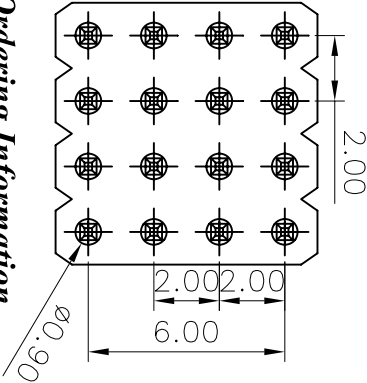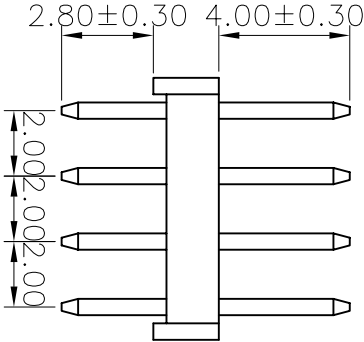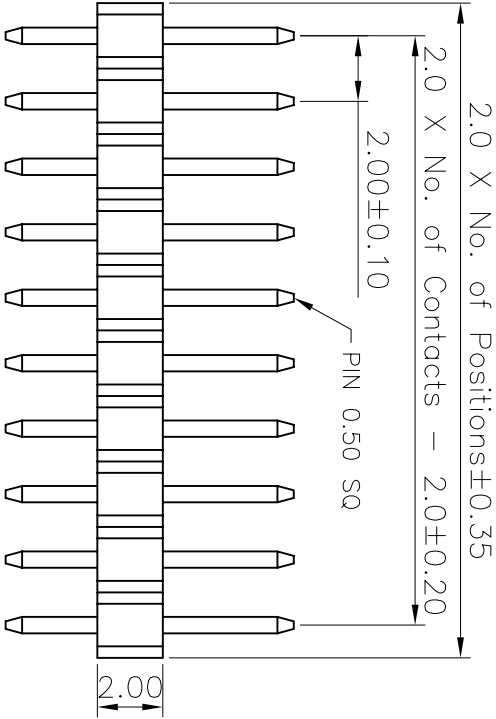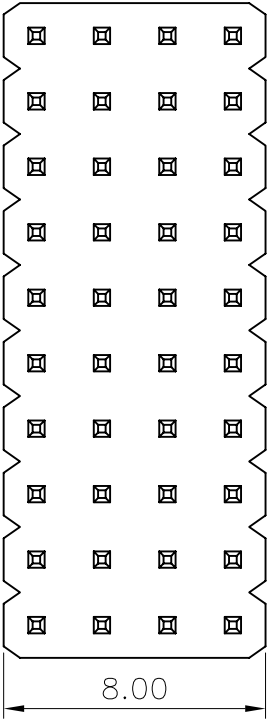

Ordering Information

MFD401 - XX XX A 01

No. of Pins per Row Contact Plating
01=Tin
02=Gold Flash
Duplex plating
05=Gold Flash /Tin
...



深圳市硕康达科技有限公司
ShenZhenShi Sokconn Technology Co., Ltd

GENERAL TOLERANCE

DESIGN: 李善桥

DATE: 2013.06.17

DWG. NO.

MFD401-A01

TITLE. 2.00 PIN HEADER

DUAL ROWS DIP TYPE

REV.	UNIT.	SCALE.	PAGE.
01	mm	1:1	1/1

X ⁺ ± 5.0°	X ⁻ ± 5.0°	X ± 0.30
.X ⁺ ± 3.0°	.X ⁻ ± 3.0°	.X ± 0.25
.XX ⁺ ± 2.0°	.XX ⁻ ± 2.0°	.XX ± 0.15
.XXX ⁺ ± 1.0°	.XXX ⁻ ± 1.0°	.XXX ± 0.10

CHECKED:

DATE:

PART NO.

MFD401-XX XX A01

BASE 2.00H