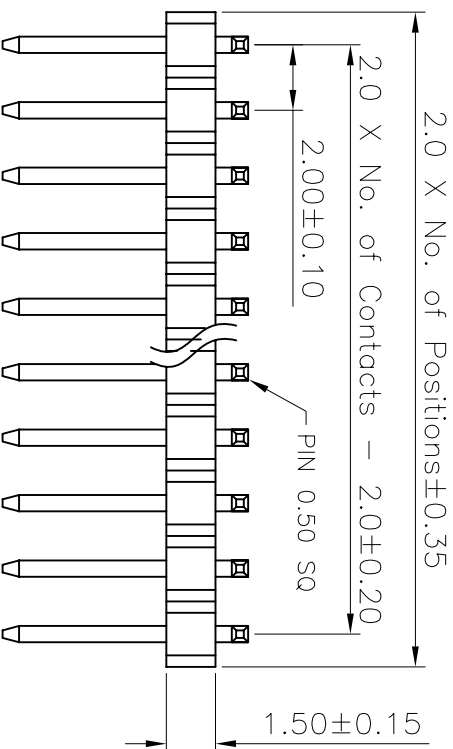
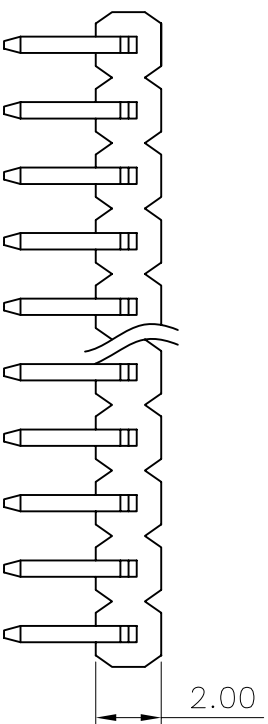


Recommended P.C.Board
Hole Layout

Specifications
Current Rating: 2Amp
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding: 500V AC
Contact Resistance: 20mΩ Max.
Operating Temperature: -40°C to +105°C

Materials
Contact Material: Brass
Insulation Material: Polyester, UL 94V-0 PBT
All materials must be GP materials

Ordering Information

MFR101 - XX XX A 01

No. of Pins per Row Contact Plating
01~40 01=Tin
02=Gold Flash
Duplex plating
05=Gold Flash /Tin
...

01~40 01=Tin
02=Gold Flash
Duplex plating
05=Gold Flash /Tin
...



深圳市硕康达科技有限公司
ShenzhenShi Sokoon Technology Co., Ltd

GENERAL TOLERANCE

DESIGN: 张荣

DATE: 2009.10.19

DWG. NO.

MFR105-A01

TITLE:

2.00 PIN HEADER

X* ± 5.0° X. ± 0.30

CHECKED:

DATE:

X* ± 3.0° X. ± 0.25

AUDITED:

DATE:

.XX* ± 2.0° .XX ± 0.15

.XXX ± 1.0° .XXX ± 0.10

APPROVED:

DATE:

PART NO.

MFR105-XX XX A01

DUAL ROWS R/A TYPE

BASE 1.50H

REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2009.10.19	张荣