
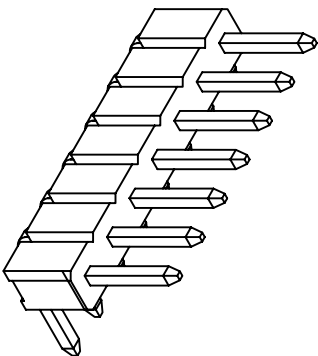


REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2013.06.20	李春桥

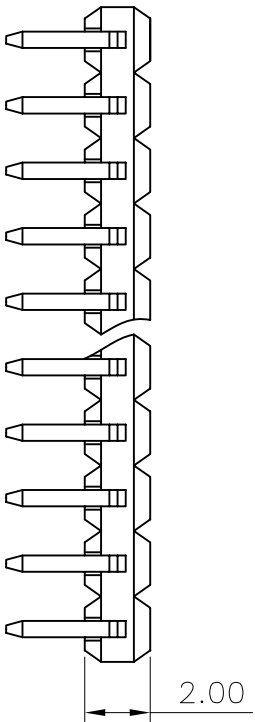

Specifications
Current Rating: 2Amp
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding: 500V AC
Contact Resistance: 20mΩ Max.
Operating Temperature: -40°C to +105°C




Materials

Contact Material: Brass

Insulation Material: Polyester, UL 94V-0
Nylon 6T

All materials must be GP materials

Recommended P.C.Board
Hole Layout

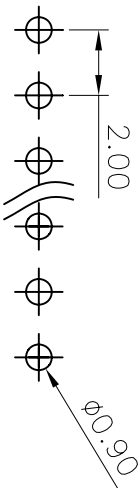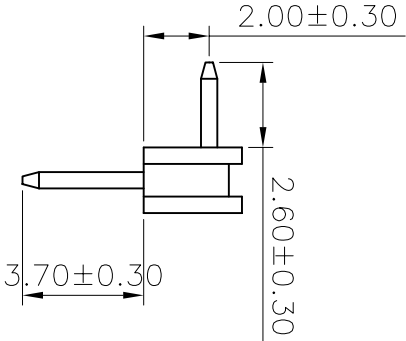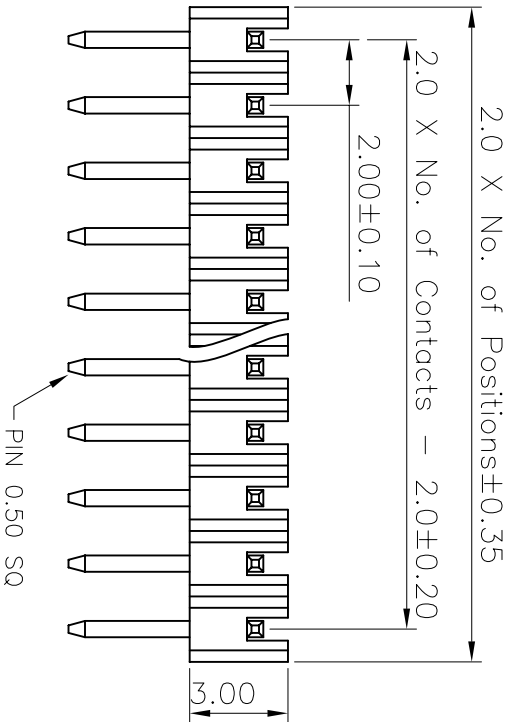

Ordering Information

MFR103 - XX XX A 01

No. of Pins per Row
01~40

Contact Plating
01=Tin
02=Gold Flash
Duplex plating
05=Gold Flash /Tin
...

塑胶	PH2.0#H3.0 带折弯槽 1*40PIN (私模)
方针	0.50*8.85 (四面光方针)



深圳市硕康达科技有限公司
ShenzhenShi Sokcom Technology Co., Ltd

GENERAL TOLERANCE				DESIGN:	李春桥	DATE:	2013.06.20	DWG. NO.	MFR103-A01	TITLE:	2.00 PIN HEADER
X. ± 5.0"	X. ± 0.30	CHECKED:		DATE:							
.X" ± 3.0"	.X ± 0.25	AUDITED:		DATE:				PART NO.			DUAL ROWS R/A TYPE
.XX ± 2.0"	.XX ± 0.15	APPROVED:		DATE:				MFR103-XX XX A01			BASE 3.00H
.XXX ± 1.0"	.XXX ± 0.10										